
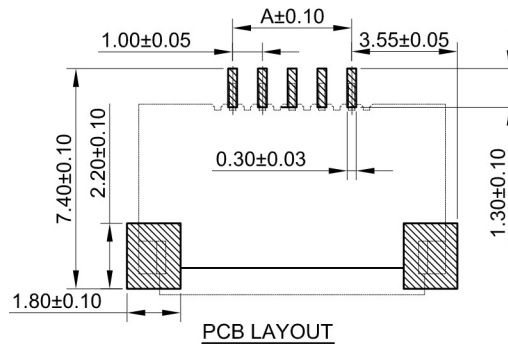
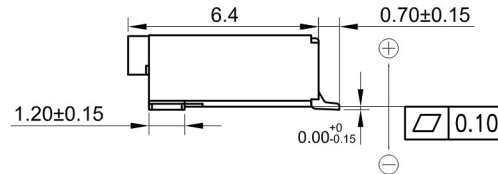
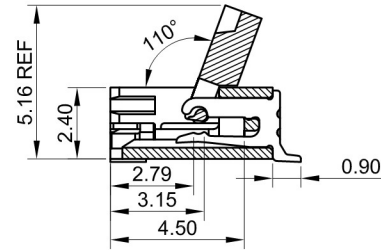





CROWN LINK®

專業薄膜開關連接器第一品牌

ROHS

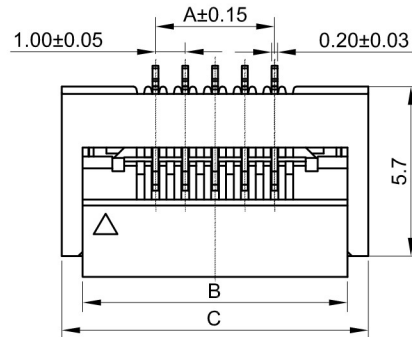

PCB LAYOUT

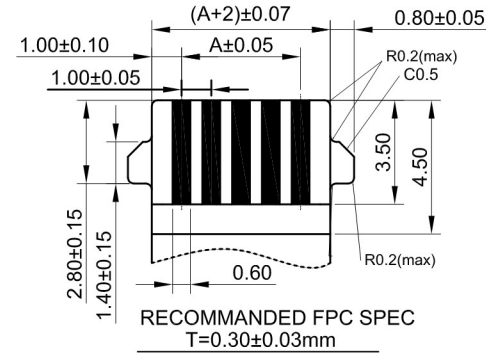

RECOMMENDED FPC SPEC
T=0.30±0.03mm

備註:

1.電氣性能

1-1.額定電流:0.5A

1-2.額定電壓:50V

1-3.耐電壓:200V

1-4.接觸電阻:30mΩ

1-5.絕緣電阻:500mΩ

2.工作溫度:-25°C~+85°C

F 1.0 - X X S B B L R J

PITCH
FFC CONNECTOR
CIRCUITS NUMBER 04T032
SMT
HORIZONTAL BOTTOM CONTACT
FLIP LOCK
REEL
MOULD NO

孔位	A	B	C	D
4	3.0	7.9	9.3	5.1
5	4.0	8.9	10.3	6.1
6	5.0	9.9	11.3	7.1
7	6.0	10.9	12.3	8.1
8	7.0	11.9	13.3	9.1
9	8.0	12.9	14.3	10.1
10	9.0	13.9	15.3	11.1
11	10.0	14.9	16.3	12.1
12	11.0	15.9	17.3	13.1
13	12.0	16.9	18.3	14.1
14	13.0	17.9	19.3	15.1
15	14.0	18.9	20.3	16.1
16	15.0	19.9	21.3	17.1
17	16.0	20.9	22.3	18.1
18	17.0	21.9	23.3	19.1
19	18.0	22.9	24.3	20.1
20	19.0	23.9	25.3	21.1
21	20.0	24.9	26.3	22.1
22	21.0	25.9	27.3	23.1
23	22.0	26.9	28.3	24.1
24	23.0	27.9	29.3	25.1
25	24.0	28.9	30.3	26.1
26	25.0	29.9	31.3	27.1
27	26.0	30.9	32.3	28.1
28	27.0	31.9	33.3	29.1
29	28.0	32.9	34.3	30.1
30	29.0	33.9	35.3	31.1
34	33.0	37.9	39.3	35.1

				一般公差 ±0.2
A	FIRST DRAWING	UNA	2019.08.21	
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍

DRAWN/繪圖 UNA 2019.08.21	DATE/日期 2019.08.21	CROWN LINK® THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.				
CHECK BY/審查 JASON 2019.08.21	DATE/日期 2019.08.21	PRODUCT NAME/品名 FPC1.0mm PITCH TOP OF CONTACT SMT				
APPROVED BY/核准 WENDY 2019.08.21	DATE/日期 2019.08.21	PART NO./料號 F1.0-XXSBBLRJ	PIN NUMBER/針數 04-30,34	SCALE/比例	SIZE/圖號 A4	UNIT/單位 mm
PACKAGE/包裝 REEL	DATE/日期 2019.08.21	MATERIAL/材質 LCP UL94V-0 COPPER ALLOY	COLOR/顏色 BLACK COLOR	ANGLE OF VIEW/視角 ③	SHEET/頁碼 1 OF 1	REV/版本 A