

4

3

2

1

CROWN LINK[®]

專業薄膜開關連接器第一品牌



RoHS

- ◆ FOR 2807 SERIES CONNECTOR
- ◆ SPECIFICATIONS
 - VOLTAGE RATING: 250 VAC RMS
 - CURRENT RATING: 2A
 - INSULATION RESISTANCE: 500 MΩ MIN
- ◆ ENVIRONMENTAL
 - TEMPERATURE RANGE: -25°C~+85°C
- ◆ PART NO.




2807H - XXDNH

SERIES NO. MOLD NO.
NO LOGO
DOUBLE ROW

CIRCUITS NUMBER 08 TO 100

◆ SPECIFIED TOLERANCE

PIN NO.	A	B	PIN NO.	A	B	PIN NO.	A	B	PIN NO.	A	B
8	3.81	6.15	32	19.05	21.39	56	34.29	36.63	80	49.53	51.87
10	5.08	7.42	34	20.32	22.66	58	35.56	37.90	82	50.8	53.14
12	6.35	8.69	36	21.59	23.93	60	36.83	39.17	84	52.07	54.41
14	7.62	9.96	38	22.86	25.20	62	38.10	40.44	86	53.34	55.68
16	8.89	11.23	40	24.13	26.47	64	39.37	41.71	88	54.61	56.95
18	10.16	12.50	42	25.4	27.74	66	40.64	42.98	90	55.88	58.22
20	11.43	13.77	44	26.67	29.01	68	41.91	44.25	92	57.15	59.49
22	12.7	15.04	46	27.94	30.28	70	43.18	45.52	94	58.42	60.76
24	13.97	16.31	48	29.21	31.56	72	44.45	46.79	96	59.69	62.03
26	15.24	17.58	50	30.48	32.82	74	45.72	48.06	98	60.96	63.30
28	16.51	18.85	52	31.75	34.09	76	46.99	49.33	100	62.23	64.57
30	17.78	20.12	54	33.02	35.36	78	48.26	50.60			

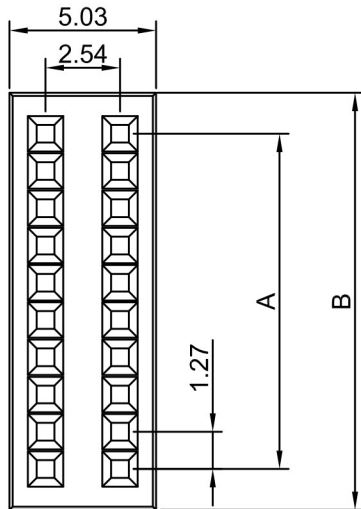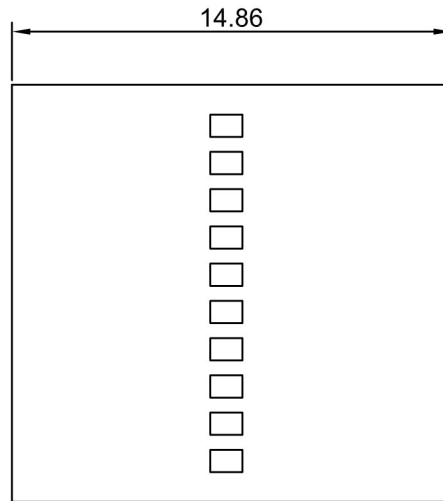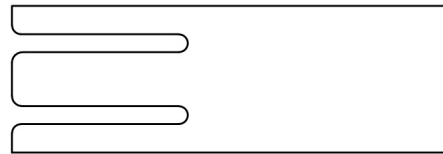

				一般公差 ± 0.2
B	Modify The size	MARY	2018.4.24	
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	
				TOLERANCE RANGE/公差範圍

DRAWN/繪圖	DATE/日期
MARY	2018.4.24
CHECK BY/審查	DATE/日期
VIVIAN	2018.4.24
APPROVED BY/核准	DATE/日期
JASON	2018.4.24
PACKAGE/包裝	08-18 PIN 1,000 PCS/BAG 20-100 PIN 500 PCS/BAG

CROWN LINK[®] THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.						
PRODUCT NAME/品名 1.27mm PITCH HOUSING FOR FFC/FPC						
PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號	UNIT/單位		
2807H-XXDNH	08-100 PIN	3:1	A4	mm		
MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本		
NY66	BLACK COLOR		1 OF 1	B		

D

D

C

C

B

B

A

A