

4

3


2

1

# CROWN LINK®




## 專業薄膜開關連接器第一品牌

### ROHS

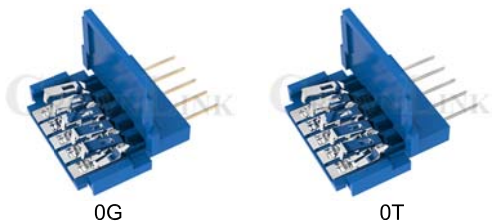


- ◆ SPECIFICATIONS  
CURRENT RATING: 2A  
INSULATION RESISTANCE: 5000 MΩ MIN  
WITHSTAND VOLTAGE: 1000 V / MIN  
PLATING: 0T (ALL OVER) / 0G (IN AREA 1)  
(SEE SECT.Y-Y)



- ◆ PART NO  
34 M - XX T(G) F  
SERIES NO. MALE T:TIN PLATED G:GOLD PLATED  
MOLD NO.  
CIRCUITS NUMBER 03 TO 14

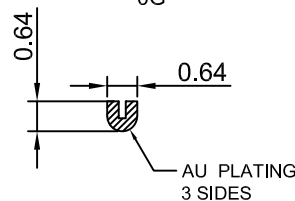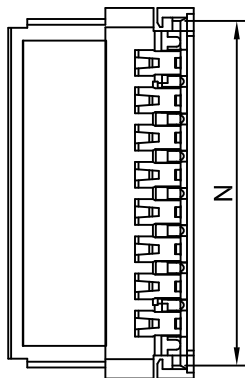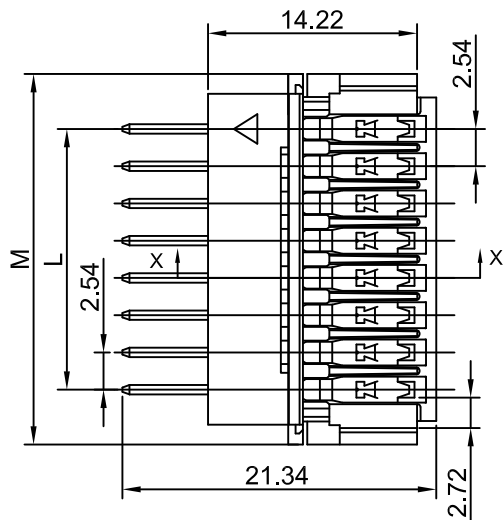

SECTION Y-Y  
SCALE 8:1

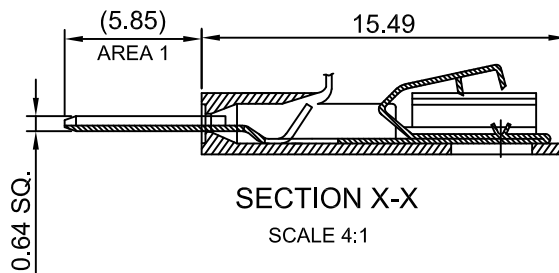

SECTION X-X  
SCALE 4:1

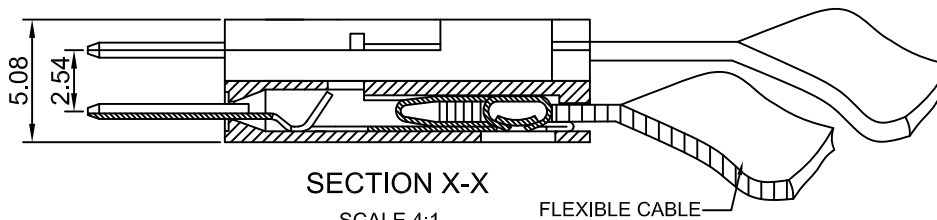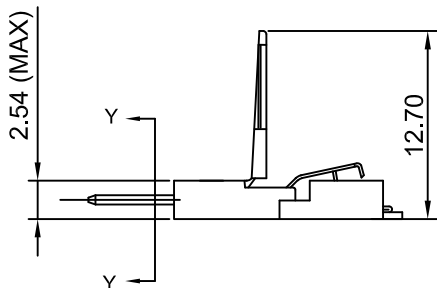

SECTION X-X  
SCALE 4:1

CABLE TERMINATED AND LID CLOSED

PIN NO.	L	M	N
03	5.08	12.45	10.54
04	7.62	14.99	13.08
05	10.16	17.53	15.62
06	12.70	20.07	18.16
07	15.24	22.61	20.70
08	17.78	25.15	23.24
09	20.32	27.69	25.78
10	22.86	30.23	28.32
11	25.40	32.77	30.86
12	27.94	35.31	33.40
13	30.48	37.85	35.94
14	33.02	40.39	38.48

				.X ±0.30
				.XX ±0.15
				X° ±2°
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍
A	FIRST DRAWING	LACY	2020.11.19	

DRAWN/繪圖 ANNIE	DATE/日期 2020.11.19	<b>CROWN LINK® THE LEADING MANUFACTURER OF FPC &amp; FFC CONNECTOR, HOUSING AND DOME.</b>			
CHECK BY/審查 VIVIAN	DATE/日期 2020.11.19	PRODUCT NAME/品名 簡易插座 Clincher			
APPROVED BY/核淮 JASON	DATE/日期 2020.11.19	PART NO./料號 34M - XXT(G)F	PIN NUMBER/針數 3-14 PIN	SCALE/比例 2:1	SIZE/圖號 A4
PACKAGE/包裝 TRAY		MATERIAL/材質 PHOSPHOR BRONZE & POLYPROPYLENE UL 94V-0	COLOR/顏色 BLUE COLOR	ANGLE OF VIEW/視角 10°	SHEET/頁碼 1 OF 1
				UNIT/單位 mm	REV/版本 A