
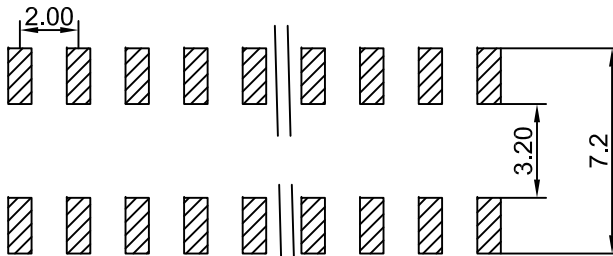
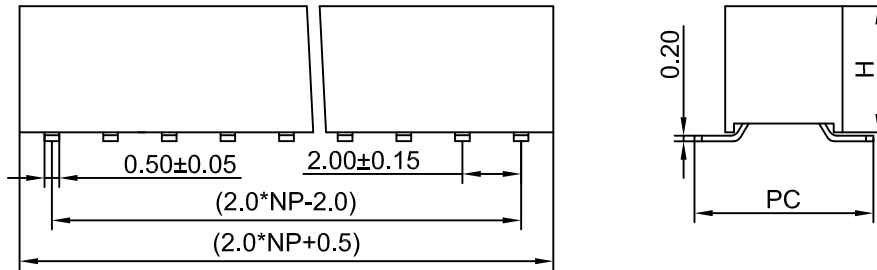
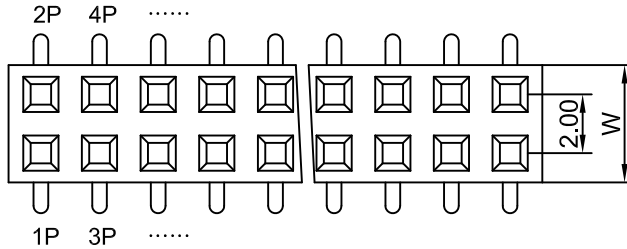


# CROWN LINK<sup>®</sup>

專業薄膜開關連接器第一品牌

ROHS



PCB LAYOUT

### ◆ Specifications

- 1.Current Rating:2Amps
- 2.Insulation Resistance:1000 MΩ min
- 3.Dielectric withstanding Voltage: AC 500V
- 4.Contact Resistance:30 mΩ max
- 5.Operating Temperature:-25℃ to+85℃
- 6.Contact Material: Phosphor bronze
- 7.Insulation Material:As follows
- 8.Plated: As follows

### ◆ PART NO.

L306	XX	-XX	2	X	X	XX	X
2.0mm double row	PLASTIC HEIGHT H*W	PIN NO. 01~40	0=180° 1=90° 2=SMT	MATERIAL	PLATED	SERIES NO.	PACKAGE
20=2.0*4.0	40=4.0*4.0			1、PBT	0、Au0.8u"	01~69:Without a column	A=bag
40=4.0*4.5	43=4.3*4.0			3、NY6T	1、Au1u"	70~89:With inside column	B=tubes
43=4.3*4.5	46=4.6*4.0			4、LCP	2、Au1.5u"	90~99:With outside column	C=tray
46=4.6*4.5	52=5.2*4.8			5、NY66	3、Au2u"		D=reel
52=5.2*4.8	63=6.35*4.0			7、NY46	4、Au3u"		
				8、NY9T	5、Au5u"		
					6、Au10u"		
					7、Selective gold		
					8、Tin		
					9、Matte-Tin		

A

				LINER	ANGLES
				.0 ±0.3	0.° ±3°
A	FIRST DRAWING	MARY	2017.08.24	.00 ±0.2	.0° ±2°
				.000 ±0.1	.00° ±1°
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍	

DRAWN/繪圖	DATE/日期	CROWN LINK <sup>®</sup> THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.			
MARY	2017.08.24	PRODUCT NAME/品名			
CHECK BY/審查	DATE/日期	PH2.0*H 2XNP SMT DOUBLE ROW FEMALE HEADER TYPE-U			
VIVIAN	2017.08.24	PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號
APPROVED BY/核准	DATE/日期	L306XX-XX2XXXXX	02P-80P		A4
WENDY	2017.08.24	MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼
PACKAGE/包裝			BLACK COLOR		1 OF 1
					REV/版本
					A

A