

4

3




2

1

CROWN LINK[®]

專業薄膜開關連接器第一品牌

ROHS

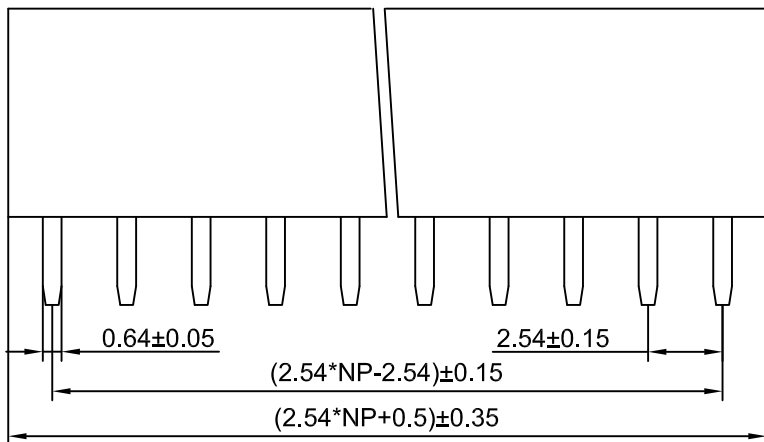


◆ Specifications

- 1.Current Rating:3Amps
- 2.Insulation Resistance:1000 MΩ min
- 3.Dielectric withstanding Voltage: AC 500V
- 4.Contact Resistance:30 mΩ max
- 5.Operating Temperature:-25℃ to+85℃
- 6.Contact Material: Phosphor bronze
- 7.Insulation Material:As follows
- 8.Plated: As follows

◆ PART NO.

L307 XX -XX 0 X X XX X

2.54mm single row	PLASTIC HEIGHT H/W	PIN NO. 01~40	0=180° 1=90° 2=SMT	MATERIAL 1、PBT 3、NY6T 4、LCP 5、NY66 7、NY46 8、NY9T	PLATED 0、Au0.8u" 1、Au1u" 2、Au1.5u" 3、Au2u" 4、Au3u" 5、Au5u" 6、Au10u" 7、Selective gold 8、Tin 9、Matte-Tin	SERIES NO. 01~69:Without a column 70~89:With inside column 90~99:With outside column	PACKAGE A=bag B=tubes C=tray D=reel
50=5.0*2.6	57=5.7*2.4	71=7.1*2.4	85=8.5*2.4				

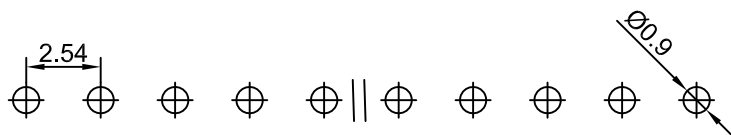

PCB LAYOUT

REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍
A	FIRST DRAWING	MARY	2017.08.22	LINER .0 ±0.3 ANGLES 0.° ±3° .00 ±0.2 .0° ±2° .000 ±0.1 .00° ±1°

DRAWN/繪圖	DATE/日期	CROWN LINK [®] THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.			
MARY	2017.08.22	PRODUCT NAME/品名 PH2.54*H 1xNP 180° SINGLE ROW FEMALE HEADER TYPE-U			
CHECK BY/審查	DATE/日期	PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號
VIVIAN	2017.08.22	L307XX-XX0XXXXX	01P-40P		A4
APPROVED BY/核准	DATE/日期	MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼
WENDY	2017.08.22		BLACK COLOR		1 OF 1
PACKAGE/包裝					REV/版本 A

D

D

C

C

B

B

A

A