
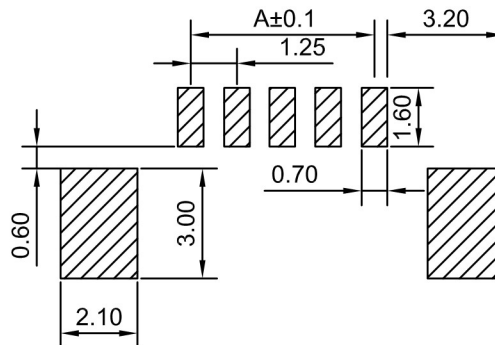





CROWN LINK[®]

專業薄膜開關連接器第一品牌

ROHS

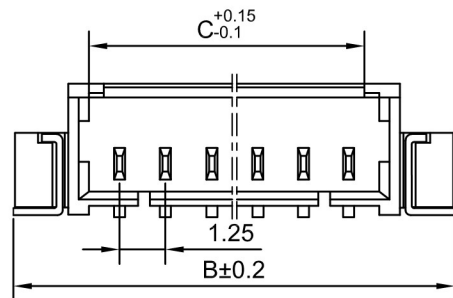

PCB Layout

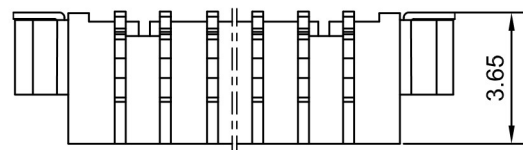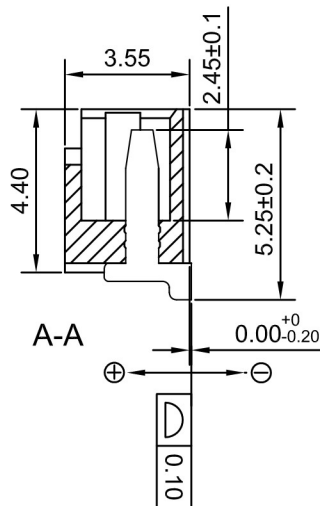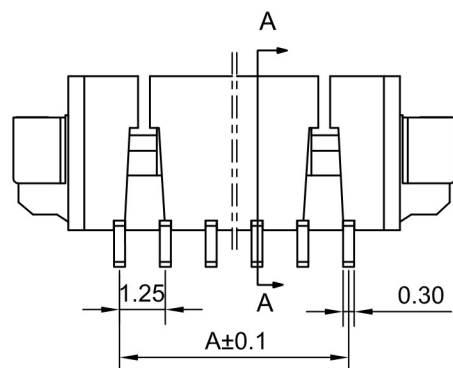

- ◆ FOR 28125-XXNJ HOUSING
- ◆ SPECIFICATIONS
 - VOLTAGE RATING: 150 V AC/DC
 - CURRENT RATING: 1.0 A
 - CONTACT RESISTANCE: 30 mΩ
 - INSULATION RESISTANCE: 500 MΩ MIN
 - WITHSTANDING VOLTAGE: 500V AC / MINUTE
- ◆ ENVIRONMENTAL
 - TEMPERATURE RANGE: -20°C~+85°C

◆ PART NO.

CL1250 S - XX S N J
SMT MOLD NO.
NO LOGO
REEL PACKAGE

SERIES NO. CIRCUITS NUMBER 02 TO 16

PIN NO.	A	B	C
02	1.25	7.25	3.10
03	2.50	8.50	4.35
04	3.75	9.75	5.60
05	5.00	11.00	6.85
06	6.25	12.25	8.10
07	7.50	13.50	9.35
08	8.75	14.75	10.60
09	10.00	16.00	11.85
10	11.25	17.25	13.10
11	12.50	18.50	14.35
12	13.75	19.75	15.60
13	15.00	21.00	16.85
14	16.25	22.25	18.10
15	17.50	23.50	19.35
16	18.75	24.75	20.60

				X.X ±0.30 X.XX ±0.20
A	FIRST DRAWING	LACY	2020.08.19	
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍

DRAWN/繪圖	DATE/日期	CROWN LINK [®] THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.				
LACY	2020.08.19					
CHECK BY/審查	DATE/日期	PRODUCT NAME/品名 1.25mm PITCH SMT WAFER				
VIVIAN	2020.08.19					
APPROVED BY/核准	DATE/日期	PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號	UNIT/單位
JASON	2020.08.19	CL1250S-XXSNJ	2-16 PIN	5:1	A4	mm
PACKAGE/包裝		MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本
	1,500PCS/REEL	BRASS & PA6T UL 94V-0	NATURAL		1 OF 1	A