

4

3


2

1

CROWN LINK[®]

專業薄膜開關連接器第一品牌

RoHS

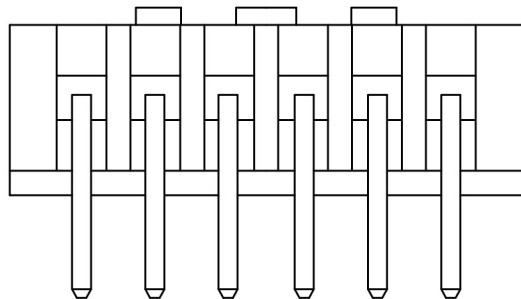

◆ SPECIFICATIONS

VOLTAGE RATING: 250 V AC , DC

CURRENT RATING: 3 A

CONTACT RESISTANCE: 0.02 Ω

INSULATION RESISTANCE: 1000 MΩ MIN

WITHSTANDING VOLTAGE: 1000V AC / MINUTE

◆ ENVIRONMENTAL

TEMPERATURE RANGE: -25°C~+85°C

◆ WIRE RANGE:AWG#22~#28

◆ PART NO.

CL2507R - XXND




ANGLE 90°

MOLD NO.

NO LOGO

SERIES NO.

CIRCUITS NUMBER 02 TO 16

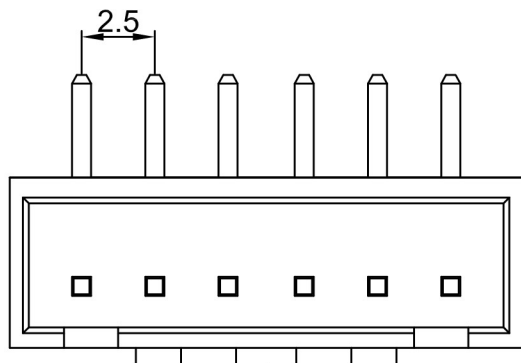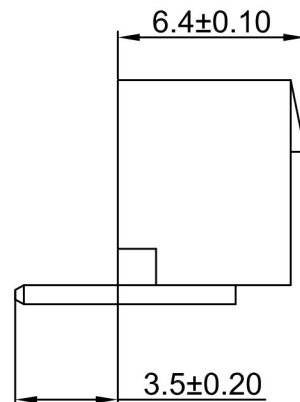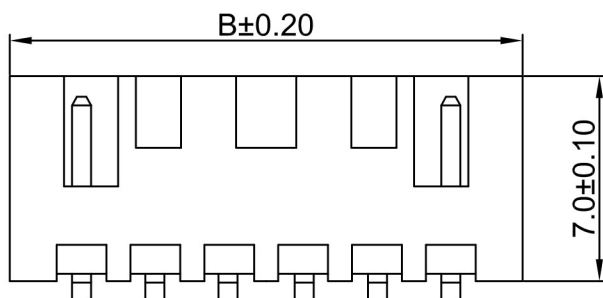

PIN NO.	A	B	PIN NO.	A	B
02	2.50	7.50	10	22.50	27.50
03	5.00	10.00	11	25.00	30.00
04	7.50	12.50	12	27.50	32.50
05	10.00	15.00	13	30.00	35.50
06	12.50	17.50	14	32.50	37.50
07	15.00	20.00	15	35.00	40.00
08	17.50	22.50	16	37.50	42.50
09	20.00	25.00			

DRAWN/繪圖	DATE/日期	CROWN LINK[®] THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.				
JUDY	2021.08.13	PRODUCT NAME/品名				
CHECK BY/審查	DATE/日期	2.50mm XHB Wafer for Cable				
VIVIAN	2021.08.13	PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號	UNIT/單位
APPROVED BY/核准	DATE/日期	CL2507R-XXND	02-16 PIN	4:1	A4	mm
JASON	2021.08.13	MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本
PACKAGE/包裝	BAG	PA66 UL94V-2(0)	WHITE COLOR	45°	1 OF 1	D

一般公差±0.2

TOLERANCE RANGE/公差範圍

REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期
--------	------------------------	----------	---------

D

C

B

A

D

C

B

A