

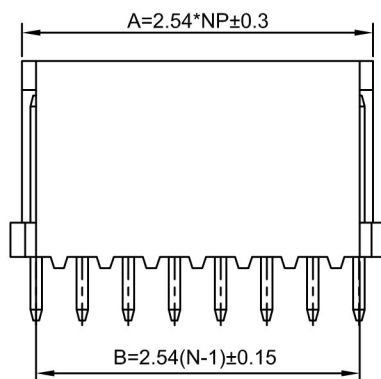
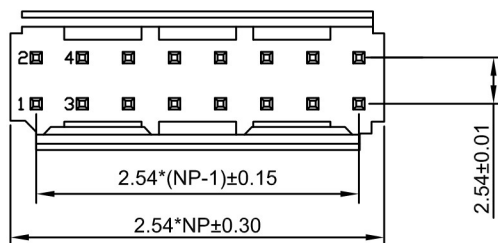


CROWN LINK[®]

專業薄膜開關連接器第一品牌

RoHS

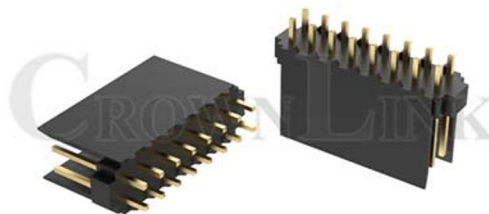

SPECIFICATIONS

VOLTAGE RATING: 250 V AC , DC
CURRENT RATING: 3 A AC , DC
CONTACT RESISTANCE: 10 mΩ MAX
INSULATION RESISTANCE: 1000 MΩ MIN
WITHSTANDING VOLTAGE: 1000V AC / MINUTE


ENVIRONMENTAL

TEMPERATURE RANGE: -25°C~+85°C

DIMENSION: A=2.54*N
B=2.54*(N-1)

PART NO.

CL254 2 V - XX B N L
SERIES NO. MOLD NO.
DOUBLE ROW NO LOGO
ANGLE 180° BLITER TRAY
CIRCUITS NUMBER 02 TO 20
GOLD PLATED 1u"
TIN PLATED 30~50u"

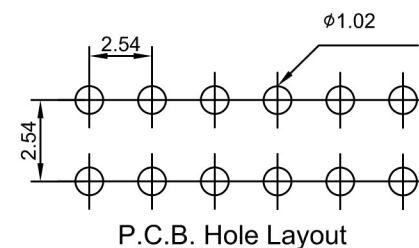

				x	±0.5	x'	±3°
				x	±0.3	x'	±2°
				xx	±0.2	xx'	±1°
				xxx	±0.1	xxx'	±1°
A	FIRST DRAWING	UNA	2019.01.14	TOLERANCE RANGE/公差範圍			
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期				

DRAWN/繪圖	DATE/日期	CROWN LINK [®] THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.					
UNA	2019.01.14	PRODUCT NAME/品名					
CHECK BY/審查	DATE/日期	2.54mm PITCH 180° WAFER					
JASON	2019.01.14	PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號	UNIT/單位	
APPROVED BY/核准	DATE/日期	CL2542V-XXBNL	2-20 PIN		A4	mm	
WENDY	2019.01.14	MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本	
PACKAGE/包裝	TUBE	NY66 UL94V-0	BLACK		1 OF 1	A	