



CROWN LINK[®]

專業薄膜開關連接器第一品牌

RoHS





POLARIZING PLUG

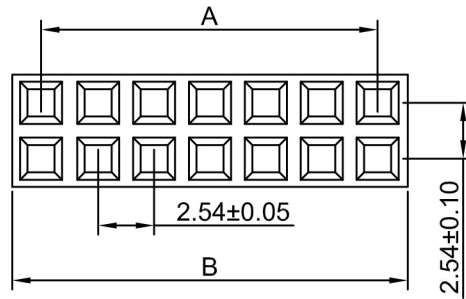

"A" & "B" DIM. TOLERANCE

- 4P ~ 20P: ±0.20
- 22P ~ 40P: ±0.25
- 42P ~ 60P: ±0.35
- 62P ~ 80P: ±0.45

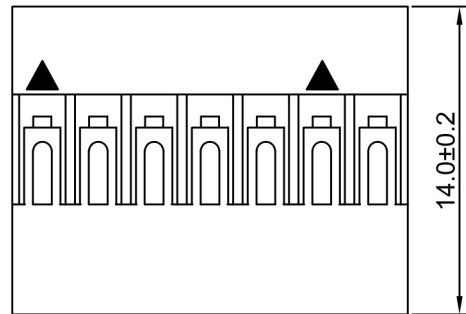

◆ FOR 280308 SERIES CONNECTOR

◆ SPECIFICATIONS

VOLTAGE RATING: 250V AC, DC

CURRENT RATING: 3A AC, DC

INSULATION RESISTANCE: 1000 MΩ MIN

◆ ENVIRONMENTAL

TEMPERATURE RANGE: -25°C~+85°C

WITHSTAND VOLTAGE: 800 V AC / MINUTE

◆ PART NO.

2803H - XX B D S

SERIES NO.

MOLD NO.

DOUBLE ROW

COLOR:BLACK

CIRCUITS NUMBER 04 TO 80

PIN NO.	A	B
04	2.54	5.08
06	5.08	7.62
08	7.62	10.16
10	10.16	12.70
12	12.70	15.24
14	15.24	17.78
16	17.78	20.32
18	20.32	22.86
20	22.86	25.40
22	25.40	27.94
24	27.94	30.48
26	30.48	33.02
28	33.02	35.56
30	35.56	38.10
32	38.10	40.64
34	40.64	43.18
36	43.18	45.72
38	45.72	48.26
40	48.26	50.80
42	50.80	53.34
44	53.34	55.88
50	60.69	63.50
54	66.04	68.58
60	73.66	76.20
64	78.74	81.28
72	88.90	91.44
80	99.06	101.60

REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍
A	FIRST DRAWING	LACY	2020.07.16	X. ± 0.50 X.X ± 0.30 X.XX ± 0.20

DRAWN/繪圖	DATE/日期	CROWN LINK [®] THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.				
LACY	2020.07.16	PRODUCT NAME/品名				
CHECK BY/審查	DATE/日期	2.54mm PITCH HOUSING FOR FFC/FPC				
VIVIAN	2020.07.16	PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號	UNIT/單位
APPROVED BY/核准	DATE/日期	2803H-XXBDS	04-80PIN	3:1	A4	mm
JASON	2020.07.16	MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本
PACKAGE/包裝	1,000PCS/BAG	NORYL UL 94V - 1	BLACK	⊕	1 OF 1	A