

4

3




2

1

CROWN LINK[®]

專業薄膜開關連接器第一品牌

ROHS

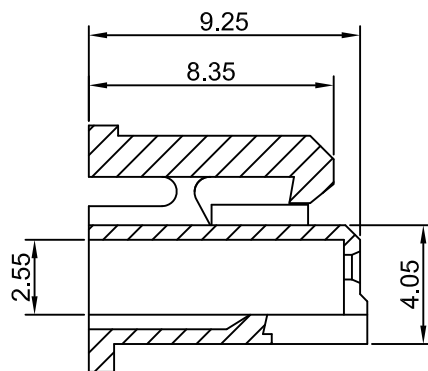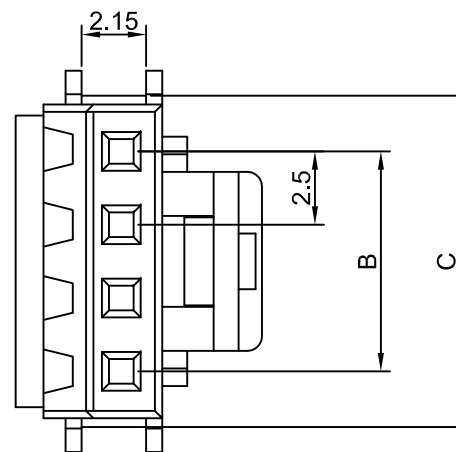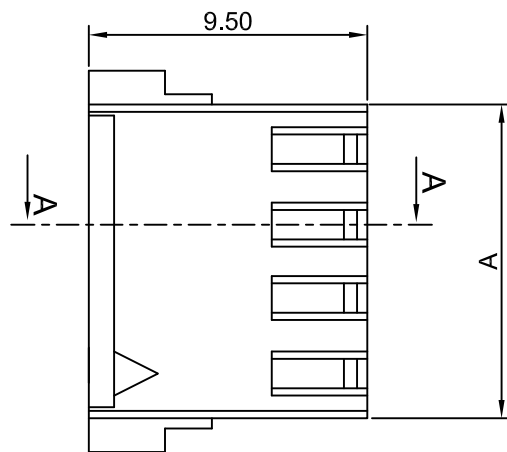

SECTION A-A

- ◆ FOR XH CONNECTOR
- ◆ SPECIFICATIONS
 - VOLTAGE RATING: 250 V AC , DC
 - CURRENT RATING: 2 A
 - INSULATION RESISTANCE: $\geq 1000 \text{ M}\Omega \text{ MIN}$
- ◆ ENVIRONMENTAL
 - TEMPERATURE RANGE: $-20^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 - WITHSTAND VOLTAGE: 1000 V AC / MINUTE
- ◆ PART NO.

CL2507Y - XXNA

SERIES NO.

MOLD NO.

NO LOGO

CIRCUITS NUMBER 02 TO 12

- ◆ SPECIFIED TOLERANCE

PIN NO.	A	B	C	PIN NO.	A	B	C
02	5.7	2.5	6.4	08	20.7	17.5	21.4
03	8.2	5.0	8.9	09	23.2	20.0	23.9
04	10.7	7.5	11.4	10	25.7	22.5	26.4
05	13.2	10.0	13.9	11	28.2	25.0	28.9
06	5.08	12.5	16.4	12	30.7	27.5	31.4
07	18.2	15.0	18.9				

				一般公差 ± 0.2
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	
TOLERANCE RANGE/公差範圍				

DRAWN/繪圖	DATE/日期	THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.						
ANNIE	2013.05.02							
CHECK BY/審查	DATE/日期	PRODUCT NAME/品名						
VIVIAN	2013.05.02	2.50mm PITCH HOUSING FOR CABLE						
APPROVED BY/核准	DATE/日期	PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號	UNIT/單位		
JASON	2013.05.02	CL2507Y-XXNA	02-12 PIN	4:1	A4	mm		
PACKAGE/包裝		MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本		
	02-12 PIN 2,000 PCS/BAG	PA66	WHITE COLOR		1 OF 2	A		