

4

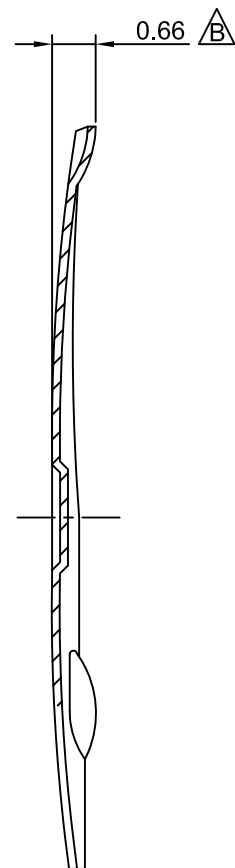
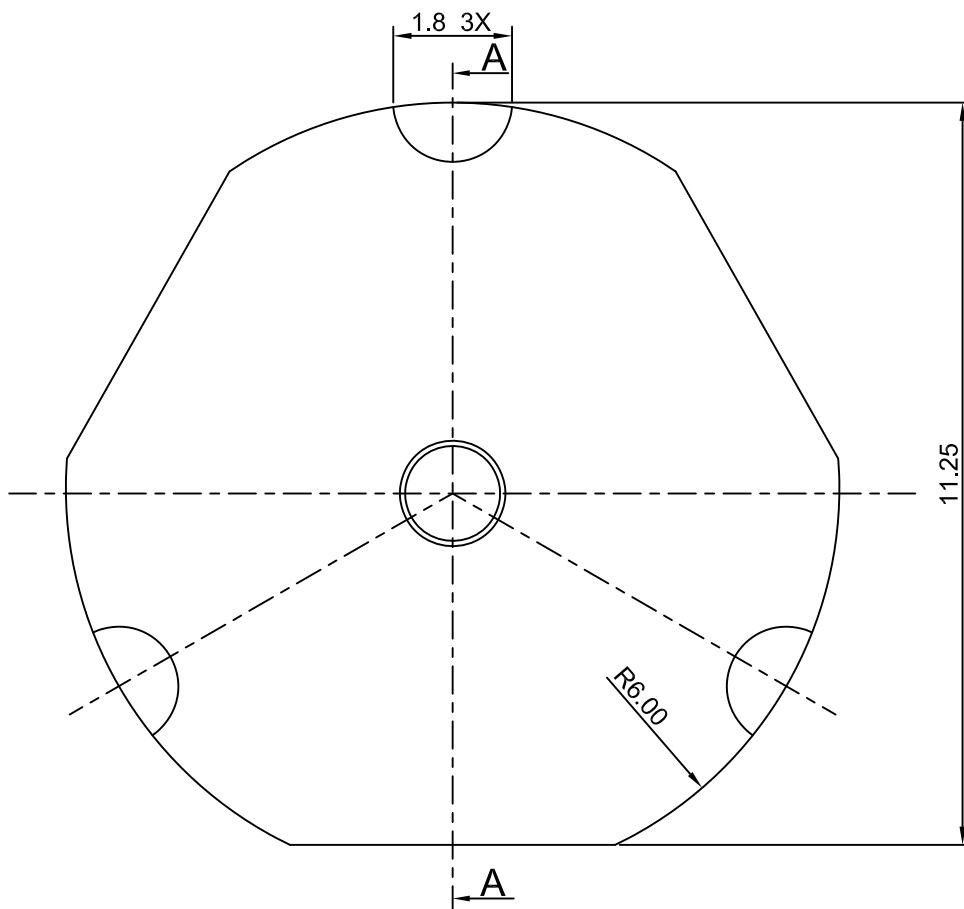
3

2

1

CROWN LINK[®]

專業薄膜開關連接器第一品牌

ROHS**◆ SPECIFICATIONS**

TRIP FORCE: 400 ± 30 g

CLICK RATIO: MIN 45 %

◆ TESTING CONDITIONS

FORCE TEST PROBE: HARD POINTED

LIFE TEST PROBE: RB 60° SILICON ROUND HEAD

LIFE TEST FORCE: 470 g

LIFE TEST SPEED: 180 CYCLE / MIN

BURR: MAX 0.05 MM

UNLESS OTHERWISE SPECIFIED TESTING METHOD
ACCORDING TO CROWNLINK STANDARD PROCEDURE**SECTION A-A**

C	CONVERT JTO NEW DRAWING FORMAT & CORRECT DIMPLE DEPTH	ANNIE	2013.08.15	X.XX ±0.10
B	CONVERT TO NEW DRAWING FORMAT & REVISE DOME HEIGHT	ANNIE	2012.03.22	
A	FIRST DRAWING	ANNIE	2011.10.18	
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	
				TOLERANCE RANGE/公差範圍

DRAWN/繪圖	DATE/日期	CROWN LINK[®] THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.				
ANNIE	2013.08.15					
CHECK BY/審查	DATE/日期	PRODUCT NAME/品名				
VIVIAN	2013.08.15	METAL DOME				
APPROVED BY/核准	DATE/日期	PART NO./料號	THICKNESS/厚度	SCALE/比例	SIZE/圖號	UNIT/單位
JASON	2013.08.15	CL12-TSD-400T	0.12 mm	18:1	A4	mm
PACKAGE/包裝	10,000PCS/BAG	MATERIAL/材質	ANGLE OF VIEW/視角		SHEET/頁碼	REV/版本
		STAINLESS STEEL SUS 304			1 OF 1	C