

4

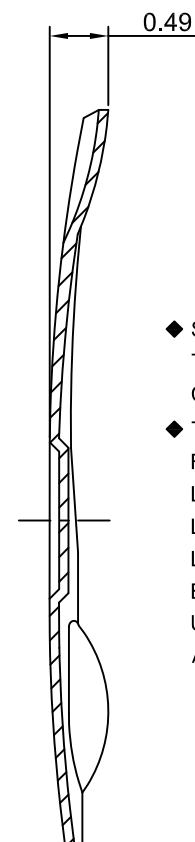
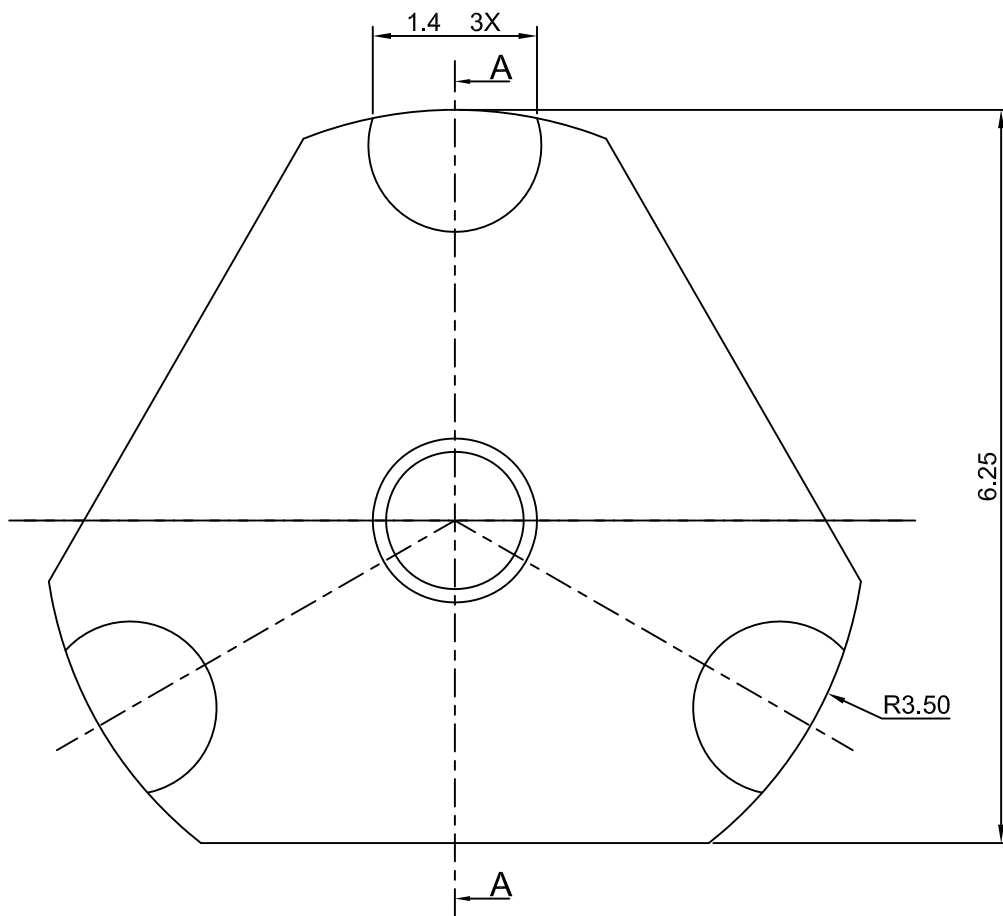
3

2

1

CROWN LINK[®]

專業薄膜開關連接器第一品牌

ROHS**◆ SPECIFICATIONS**

TRIP FORCE: 300 ± 30 g

CLICK RATIO: MIN 35 %

◆ TESTING CONDITIONS

FORCE TEST PROBE: HARD POINTED

LIFE TEST PROBE: RB 60° SILICON ROUND HEAD

LIFE TEST FORCE: 365 g

LIFE TEST SPEED: 180 CYCLE / MIN

BURR: MAX 0.05 MM

UNLESS OTHERWISE SPECIFIED TESTING METHOD
ACCORDING TO CROWN LINK STANDARD PROCEDURE**SECTION A-A**

				X.XX ±0.10
A	FIRST DRAWING	ANNIE	2013.07.02	TOLERANCE RANGE/公差範圍
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	

DRAWN/繪圖	DATE/日期	CROWN LINK[®] THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.						
ANNIE	2013.07.02	PRODUCT NAME/品名						
CHECK BY/審查	DATE/日期	METAL DOME						
VIVIAN	2013.07.02	PART NO./料號	THICKNESS/厚度	SCALE/比例	SIZE/圖號	UNIT/單位		
APPROVED BY/核准	DATE/日期	CL7-TND-300T	0.08 mm	16:1	A4	mm		
JASON	2013.07.02	MATERIAL/材質			ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本	
PACKAGE/包裝	10,000PCS/BAG	DOUBLE SIDE NICKEL PLATED STAINLESS STEEL SUS 304				1 OF 1	A	