

4


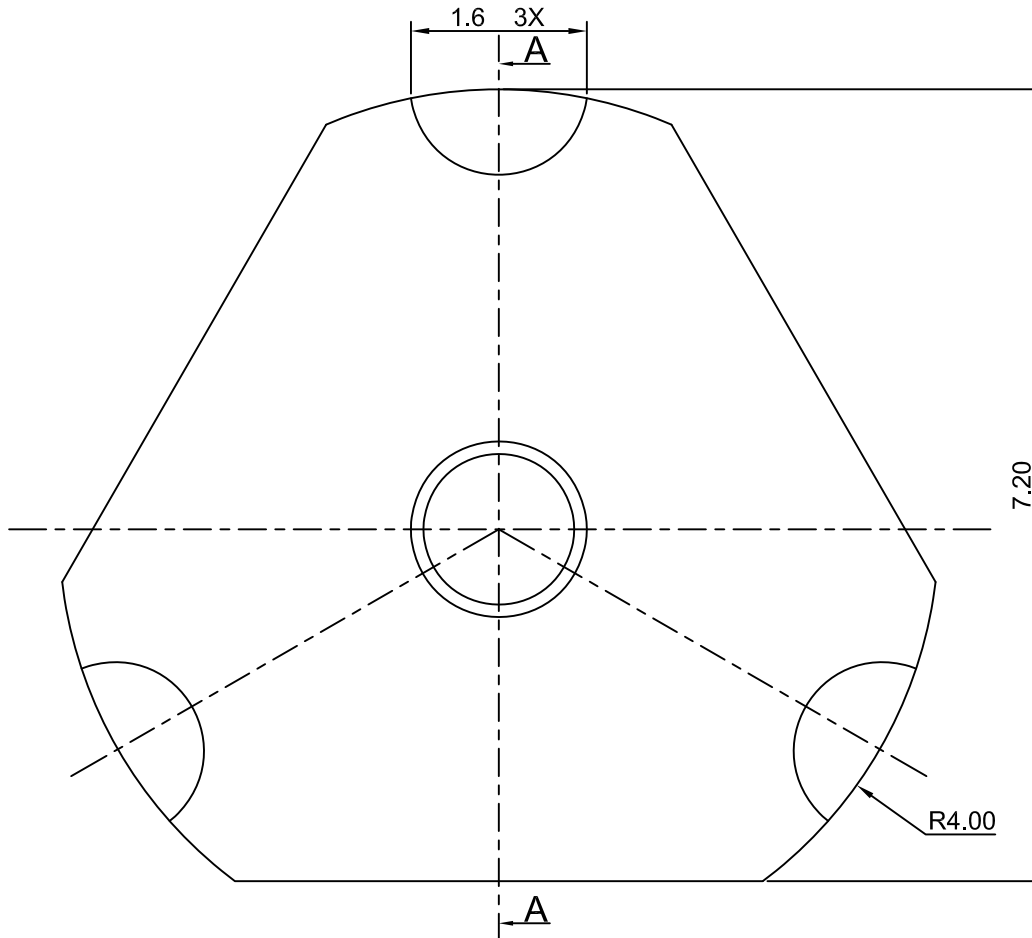
3

2

1

CROWN LINK[®]

專業薄膜開關連接器第一品牌

ROHS**◆ SPECIFICATIONS**

TRIP FORCE: 230 ± 30 g

CLICK RATIO: MIN 50 %

◆ TESTING CONDITIONS

FORCE TEST PROBE: HARD POINTED

LIFE TEST PROBE: RB 60° SILICON ROUND HEAD

LIFE TEST FORCE: 285 g

LIFE TEST SPEED: 180 CYCLE / MIN

BURR: MAX 0.05 MM

UNLESS OTHERWISE SPECIFIED TESTING METHOD
ACCORDING TO CROWNLINK STANDARD PROCEDURE**SECTION A - A**

				X.XX ±0.10
A	FIRST DRAWING	ANNIE	2013.07.02	
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	

X.XX ±0.10

TOLERANCE
RANGE/公差範圍

DRAWN/繪圖	DATE/日期	CROWN LINK[®] THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.						
ANNIE	2013.07.02							
CHECK BY/審查	DATE/日期	PRODUCT NAME/品名						
VIVIAN	2013.07.02	METAL DOME						
APPROVED BY/核准	DATE/日期	PART NO./料號	THICKNESS/厚度	SCALE/比例	SIZE/圖號	UNIT/單位		
JASON	2013.07.02	CL8-TSD-230T	0.08 mm	15:1	A4	mm		
PACKAGE/包裝		MATERIAL/材質			ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本	
	10,000PCS/BAG	STAINLESS STEEL SUS 304				1 OF 1	A	

CROWN LINK[®]**THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.**

PRODUCT NAME/品名

METAL DOME

PART NO./料號

CL8-TSD-230T

THICKNESS/厚度

0.08 mm

SCALE/比例

15:1

SIZE/圖號

A4


UNIT/單位

mm

MATERIAL/材質

STAINLESS STEEL SUS 304

ANGLE OF VIEW/視角



SHEET/頁碼

1 OF 1

REV/版本

A