

4

3



2

1

CROWN LINK[®]

專業薄膜開關連接器第一品牌

ROHS

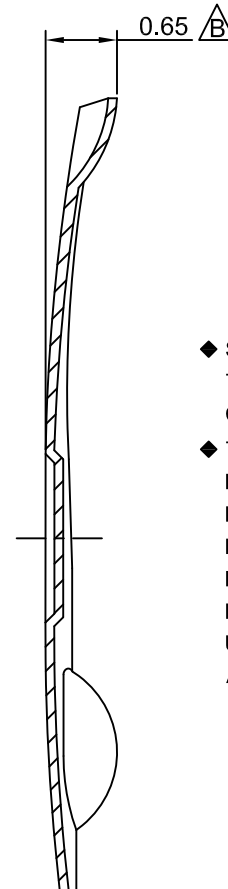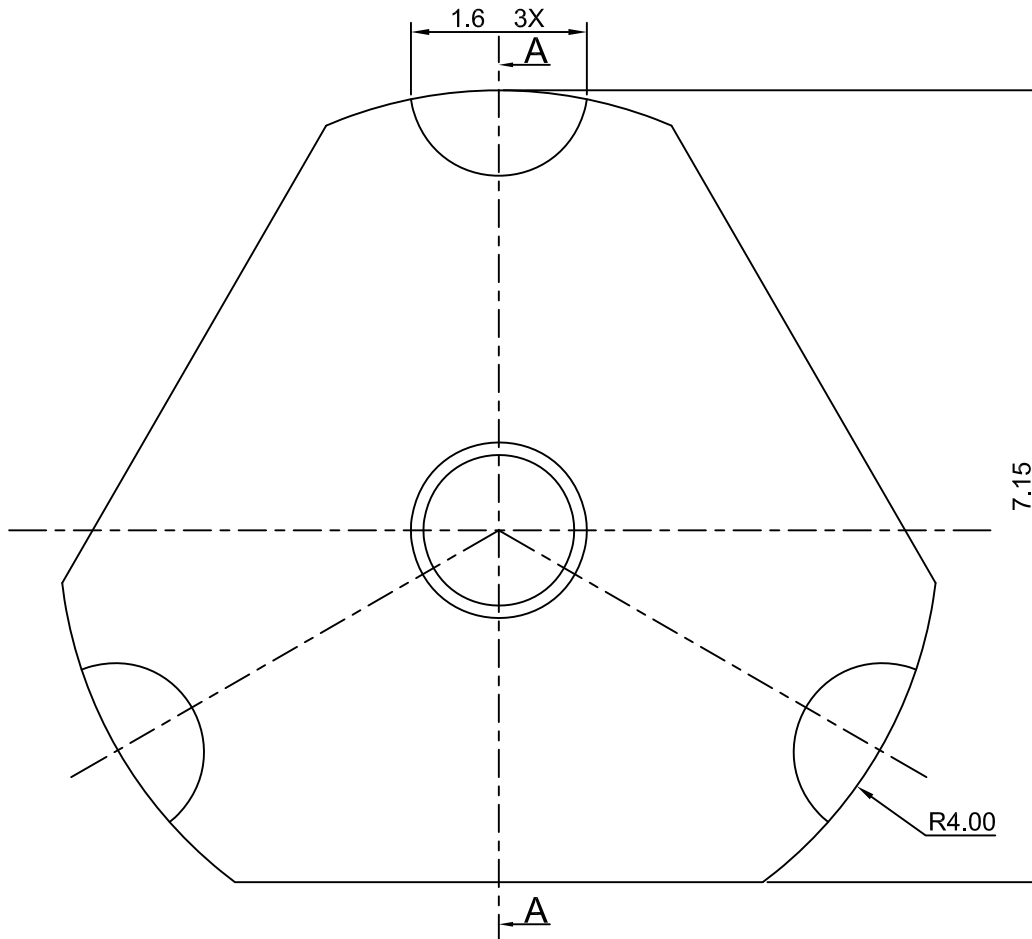

◆ SPECIFICATIONS

TRIP FORCE: 450 ± 30 g

CLICK RATIO: MIN 55 %

◆ TESTING CONDITIONS

FORCE TEST PROBE: HARD POINTED

LIFE TEST PROBE: RB 60° SILICON ROUND HEAD

LIFE TEST FORCE: 530 g

LIFE TEST SPEED: 180 CYCLE / MIN

BURR: MAX 0.05 MM

UNLESS OTHERWISE SPECIFIED TESTING METHOD
ACCORDING TO CROWN LINK STANDARD PROCEDURE

SECTION A - A

D	NEW DRAWING FORMAT	ANNIE	2013.07.02	X.XX ±0.10
B	DIMENSIONS CHANGE	ANNIE	2012.09.10	
A	FIRST RELEASE	ANNIE	2011.04.16	
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍

DRAWN/繪圖	DATE/日期	CROWN LINK[®] THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.				
ANNIE	2013.07.02	PRODUCT NAME/品名				
CHECK BY/審查	DATE/日期	METAL DOME				
VIVIAN	2013.07.02	PART NO./料號				
APPROVED BY/核准	DATE/日期	CL8-TSD-450T				
JASON	2013.07.02	THICKNESS/厚度				
PACKAGE/包裝	10,000PCS/BAG	0.08 mm				
		SCALE/比例				
		15:1				
		SIZE/圖號				
		A4				
		UNIT/單位				
		mm				
		MATERIAL/材質				
		STAINLESS STEEL SUS 304				
		ANGLE OF VIEW/視角				
		1 OF 1				
		SHEET/頁碼				
		REV/版本				
		D				