

4

3



2

1

CROWN LINK[®]

專業薄膜開關連接器第一品牌

ROHS

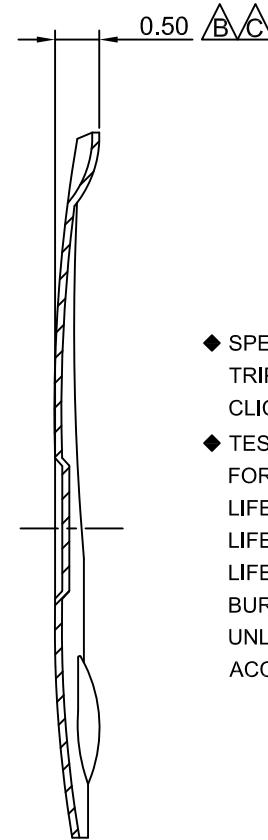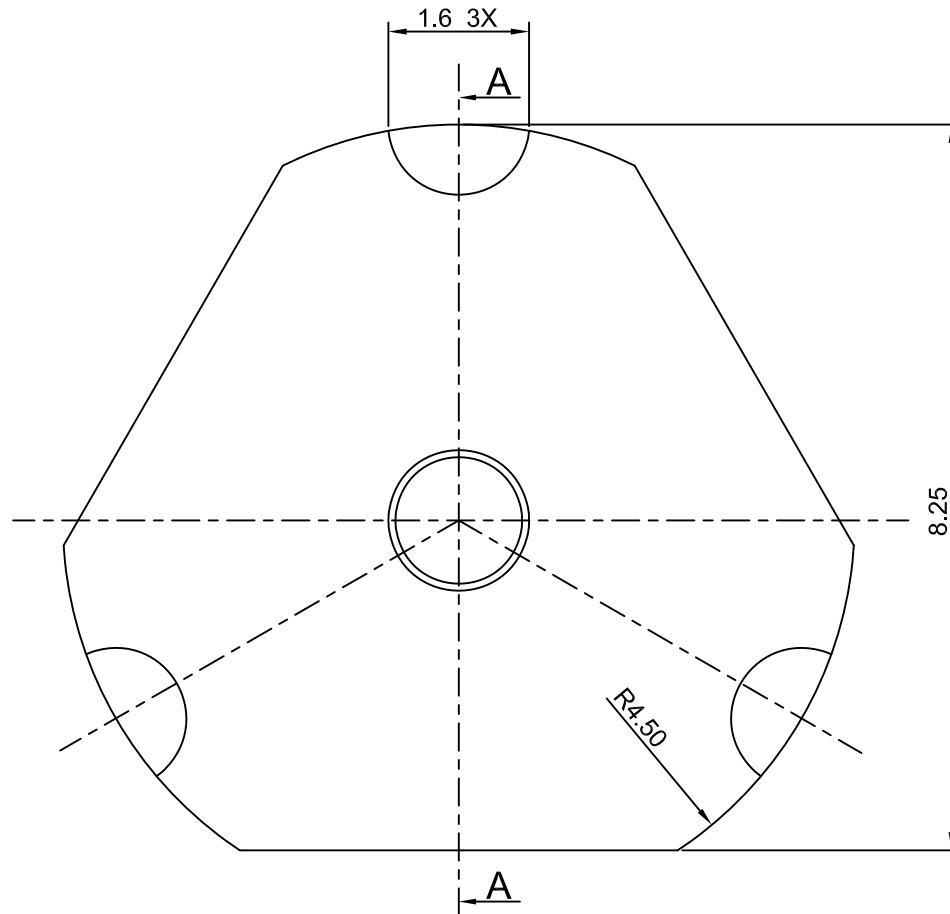

◆ SPECIFICATIONS

TRIP FORCE: 200 ± 30 g

CLICK RATIO: MIN 25 %

◆ TESTING CONDITIONS

FORCE TEST PROBE: HARD POINTED

LIFE TEST PROBE: RB 60° SILICON ROUND HEAD

LIFE TEST FORCE: 255 g

LIFE TEST SPEED: 180 CYCLE / MIN

BURR: MAX 0.05 MM

UNLESS OTHERWISE SPECIFIED TESTING METHOD
ACCORDING TO CROWN LINK STANDARD PROCEDURE

SECTION A-A

C	NEW DRAWING FORMAT & REVISE DOME HEIGHT	ANNIE	2013.07.03	X.XX ±0.10
B	CONVERT TO NEW DRAWING FORMAT & REVISE DOME HEIGHT	ANNIE	2012.08.12	
A	FIRST DRAWING	ANNIE	2011.05.21	
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	
				TOLERANCE RANGE/公差範圍

DRAWN/繪圖	DATE/日期	CROWN LINK[®] THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.				
ANNIE	2013.07.03					
CHECK BY/審查	DATE/日期	PRODUCT NAME/品名 METAL DOME				
VIVIAN	2013.07.03					
APPROVED BY/核准	DATE/日期	PART NO./料號	THICKNESS/厚度	SCALE/比例	SIZE/圖號	UNIT/單位
JASON	2013.07.03	CL9-TSD-200T	0.08 mm	12:1	A4	mm
PACKAGE/包裝		MATERIAL/材質		ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本
	10,000PCS/BAG	STAINLESS STEEL SUS 304		1 OF 1	1 OF 1	C