
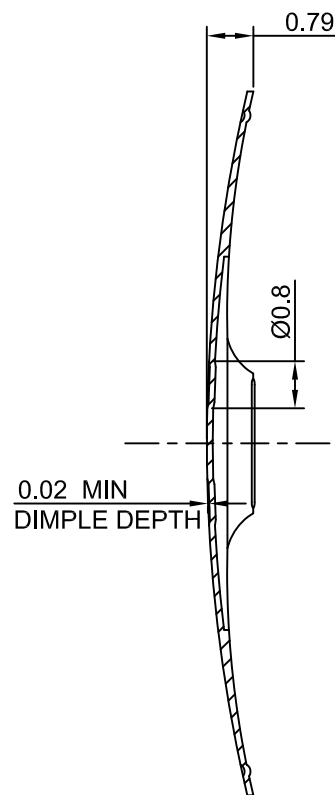


CROWN LINK[®]

專業薄膜開關連接器第一品牌

ROHS

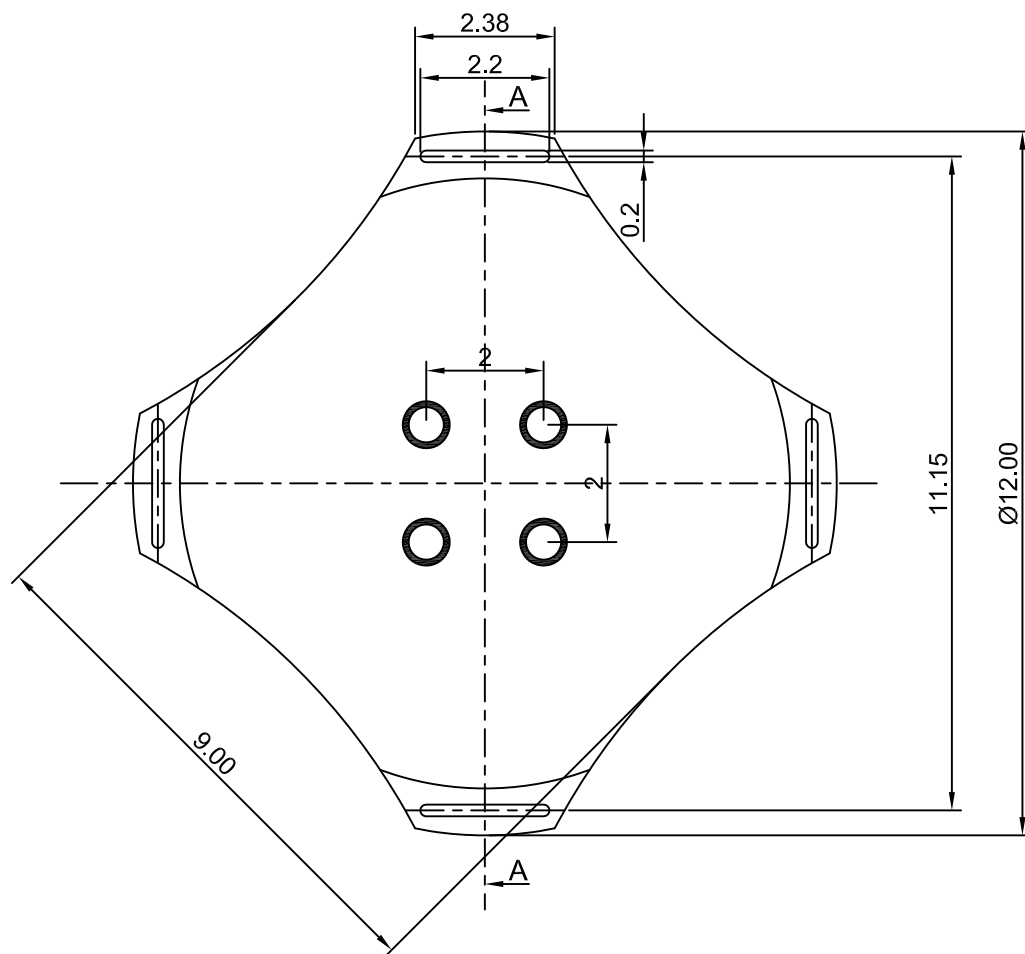

SECTION A - A

◆ SPECIFICATIONS

TRIP FORCE: 500 ± 30 g

CLICK RATIO: MIN 60 %

CONTACT LIFE: TO BE ADVISED

◆ TESTING CONDITIONS

FORCE TEST PROBE: HARD POINTED

LIFE TEST PROBE: RB 60° SILICON ROUND HEAD

LIFE TEST FORCE: 585 g

LIFE TEST SPEED: 180 CYCLE / MIN

BURR: MAX 0.05 MM

UNLESS OTHERWISE SPECIFIED TESTING METHOD
ACCORDING TO CROWNLINK STANDARD PROCEDURE

				X.X ±0.10 X.XX ±0.05
B	ADD CONTACT LIFE SPECIFICATION	ANNIE	2013.06.17	
A	FIRST DRAWING	ANNIE	2012.03.10	
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍

DRAWN/繪圖	DATE/日期	 THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.				
ANNIE	2013.06.17					
CHECK BY/審查	DATE/日期	PRODUCT NAME/品名				
VIVIAN	2013.06.17	METAL DOME				
APPROVED BY/核准	DATE/日期	PART NO./料號	THICKNESS/厚度	SCALE/比例	SIZE/號號	UNIT/單位
JASON	2013.06.17	CL12-QSS4D-500T	0.10 mm	8:1	A4	mm
PACKAGE/包裝		MATERIAL/材質		ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本
	10,000PCS/BAG	STAINLESS STEEL SUS 304			1 OF 1	B