

4

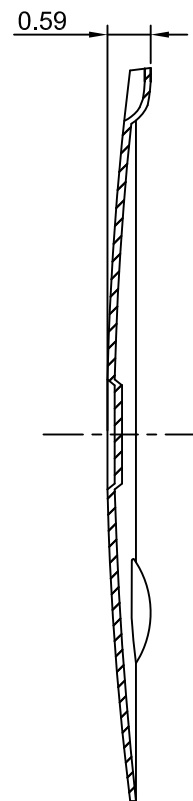
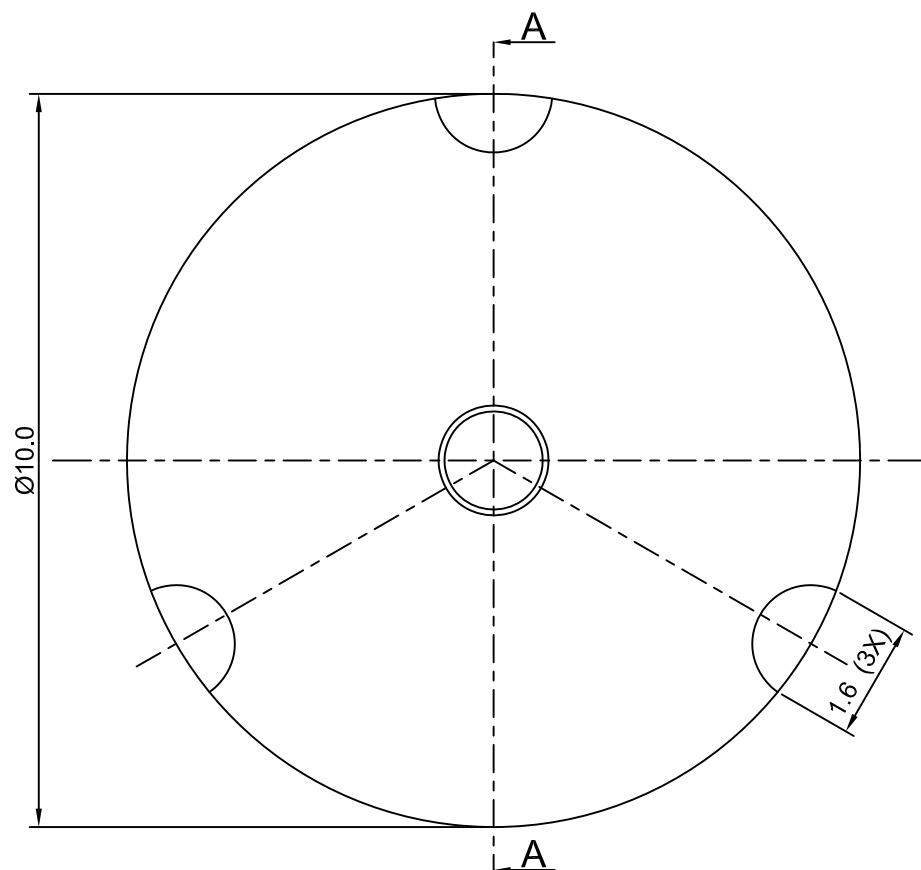
3

2

1

CROWN LINK[®]

專業薄膜開關連接器第一品牌

ROHS**SECTION A-A****◆ SPECIFICATIONS**

TRIP FORCE: 350 ± 30 g

CLICK RATIO: MIN 45 %

◆ TESTING CONDITIONS

FORCE TEST PROBE: HARD POINTED

LIFE TEST PROBE: RB 60° SILICON ROUND HEAD

LIFE TEST FORCE: 420 g

LIFE TEST SPEED: 180 CYCLE / MIN

BURR: MAX 0.05 MM

UNLESS OTHERWISE SPECIFIED TESTING METHOD
ACCORDING TO CROWN LINK STANDARD PROCEDURE

C	CONVERT TO NEW DRAWING FORMAT & REVISE DIMPLE DEPTH	ANNIE	2013.01.07	X.XX ±0.10
B	CONVERT TO NEW DRAWING FORMAT	ANNIE	2005.03.02	
A	FIRST RELEASE	ANNIE	2004.07.21	
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	
				TOLERANCE RANGE/公差範圍

DRAWN/繪圖	DATE/日期	CROWN LINK[®] THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.				
ANNIE	2014.01.07					
CHECK BY/審查	DATE/日期	PRODUCT NAME/品名				
VIVIAN	2014.01.07	METAL DOME				
APPROVED BY/核准	DATE/日期	PART NO./料號	THICKNESS/厚度	SCALE/比例	SIZE/圖號	UNIT/單位
JASON	2014.01.07	CL10-RWDS-350T	0.10 mm	10:1	A4	mm
PACKAGE/包裝		MATERIAL/材質	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本	
	10,000PCS/BAG	STAINLESS STEEL SUS 304		1 OF 1	C	