

4

3



2

1

CROWN LINK[®]

專業薄膜開關連接器第一品牌

ROHS

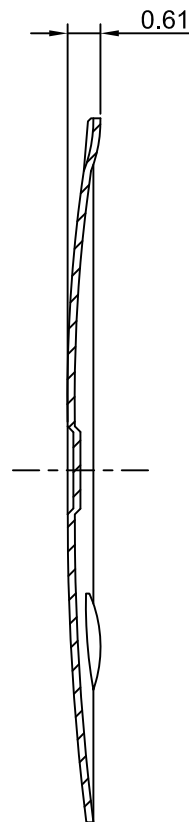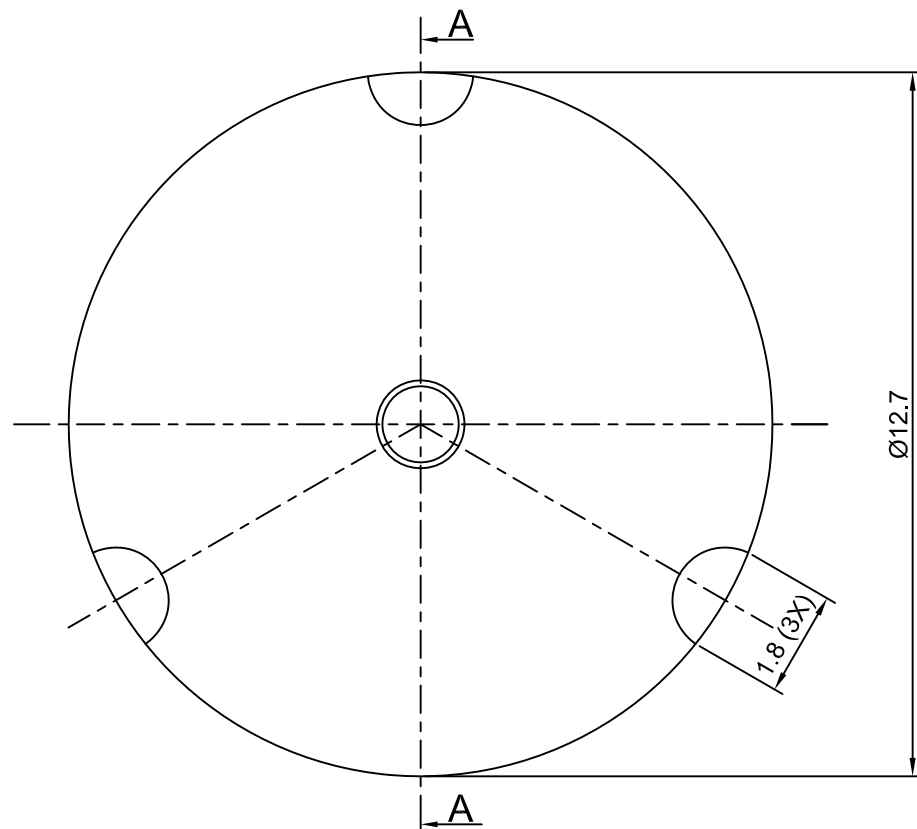

SECTION A-A



◆ SPECIFICATIONS

TRIP FORCE: 480 ± 30 g

CLICK RATIO: MIN 40 %

◆ TESTING CONDITIONS

FORCE TEST PROBE: HARD POINTED

LIFE TEST PROBE: RB 60° SILICON ROUND HEAD

LIFE TEST FORCE: 560 g

LIFE TEST SPEED: 180 CYCLE / MIN

BURR: MAX 0.05 MM

UNLESS OTHERWISE SPECIFIED TESTING METHOD

ACCORDING TO CROWN LINK STANDARD PROCEDURE

				X.XX ± 0.10
B	NEW DRAWING FORMAT & CORRECT DRAWING ERROR	ANNIE	2014.01.14	
A	FIRST DRAWING	ANNIE	2005.04.09	
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍

DRAWN/繪圖	DATE/日期	CROWN LINK[®] THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.				
ANNIE	2014.01.14					
CHECK BY/審查	DATE/日期	PRODUCT NAME/品名				
VIVIAN	2014.01.14	METAL DOME				
APPROVED BY/核准	DATE/日期	PART NO./料號	THICKNESS/厚度	SCALE/比例	SIZE/圖號	UNIT/單位
JASON	2014.01.14	CL12.7-RWDSD-480T	0.12 mm	8:1	A4	mm
PACKAGE/包裝		MATERIAL/材質	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本	
	10,000PCS/BAG	STAINLESS STEEL SUS 304		1 OF 1	B	