

4

3



2

1

CROWN LINK[®]

專業薄膜開關連接器第一品牌

ROHS

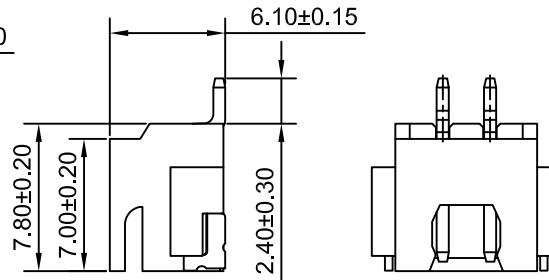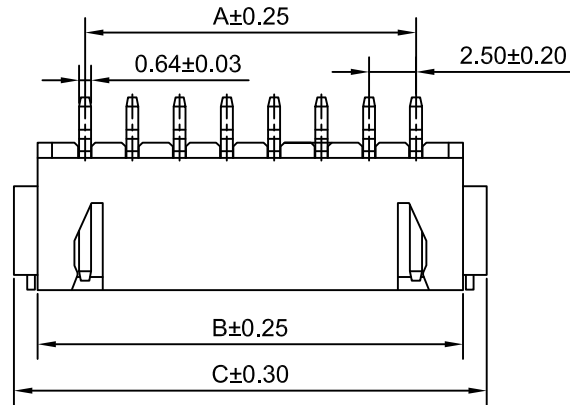





02PIN

- ◆ FOR 2501H HOUSING
- ◆ SPECIFICATIONS
 - VOLTAGE RATING: 250V AC,DC
 - CURRENT RATING: 3A AC,DC
 - CONTACT RESISTANCE: 10 mΩ MAX
 - INSULATION RESISTANCE: 1000 MΩ MIN
 - WITHSTANDING VOLTAGE: 800V AC / MINUTE
- ◆ ENVIRONMENTAL
 - TEMPERATURE RANGE: -40°C~+105°C

◆ PART NO.

CL2501 S - XX W N P
 SMT MOLD NO.
 NO LOGO
 LYING DOWN

SERIES NO. CIRCUITS NUMBER 02 TO 16

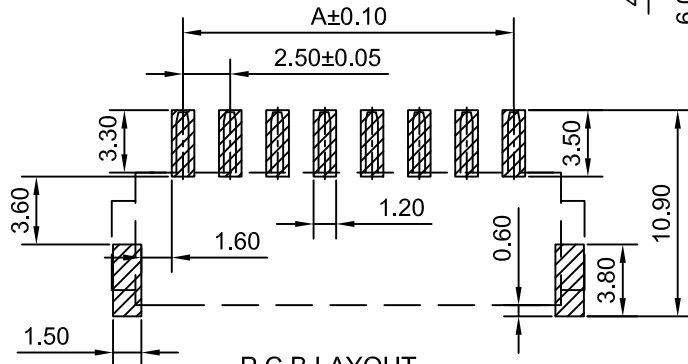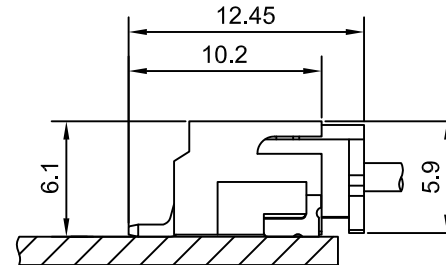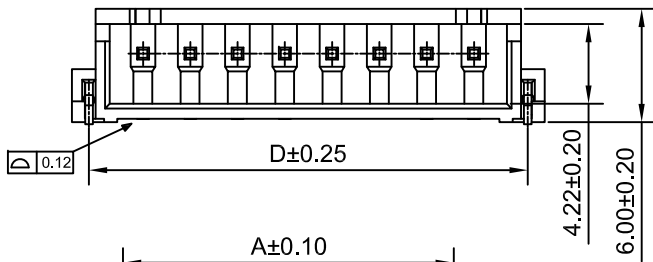

P.C.B LAYOUT

Part No.	Dimensions			
	A	B	C	D
02	2.50	7.50	10.00	8.20
03	5.00	10.00	12.50	10.70
04	7.50	12.50	15.00	13.20
05	10.00	15.00	17.50	15.70
06	12.50	17.50	20.00	18.20
07	15.00	20.00	22.50	20.70
08	17.50	22.50	25.00	23.20
09	20.00	25.00	27.50	25.70
10	22.50	27.50	30.00	28.20
11	25.00	30.00	32.50	30.70
12	27.50	32.50	35.00	33.20
13	30.00	35.00	37.50	35.70
14	32.50	37.50	40.00	38.20
15	35.00	40.00	42.50	40.70
16	37.50	42.50	45.00	43.20

TOLERANCE RANGE/公差範圍

X. ±0.50 X.* ±1°
 .X ±0.30 .X* ±0.1°
 .XX ±0.20 .XX* ±0.01°
 .XXX ±0.10 .XXX* ±0.005°

DRAWN/繪圖 JUDY	DATE/日期 2023.07.13	CROWN LINK[®] THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.				
CHECK BY/審查 VIVIAN	DATE/日期 2023.07.13	PRODUCT NAME/品名 2.50mm PITCH SMT WAFER				
APPROVED BY/核准 JASON	DATE/日期 2023.07.13	PART NO./料號 CL2501S-XXWNP	PIN NUMBER/針數 02-16 PIN	SCALE/比例 5:1	SIZE/圖號 A4	UNIT/單位 mm
PACKAGE/包裝	REEL	MATERIAL/材質 BRASS TIN LCP UL 94V-0	COLOR/顏色 NATURAL	ANGLE OF VIEW/視角 	SHEET/頁碼 1 OF 1	REV/版本 A

REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期