

4

3




2

1


CROWN LINK®

專業薄膜開關連接器第一品牌

RoHS

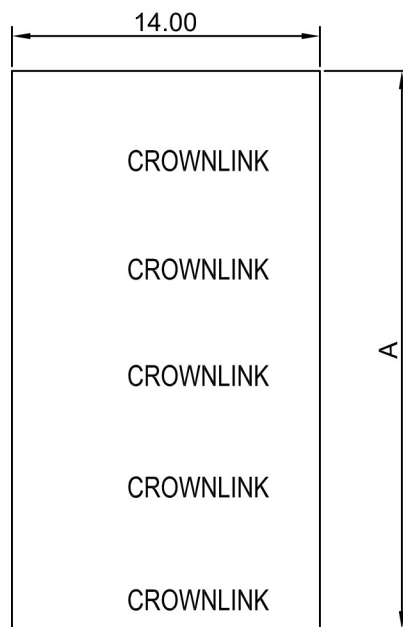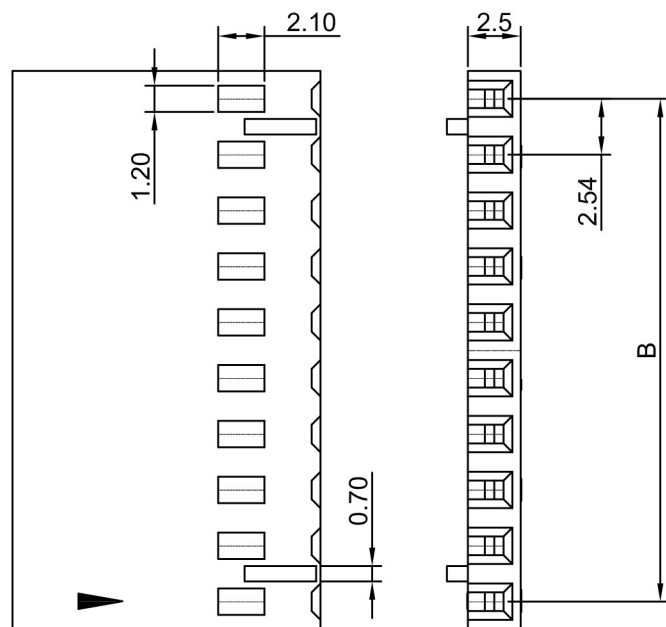

- ◆ FOR 2802、2808、2811 SERIES CONNECTOR
- ◆ SPECIFICATIONS
 - VOLTAGE RATING: 250 VAC RMS
 - CURRENT RATING: 2A
 - INSULATION RESISTANCE: 500 MΩ MIN
- ◆ ENVIRONMENTAL
 - TEMPERATURE RANGE: -25°C~+85°C
- ◆ DIMENSION: N=CIRCUIT NO.
 - A=2.54*N
 - B=2.54*(N-1)
- ◆ PART NO.
 - 2802HS - XX
 - SERIES NO.
 - CIRCUITS NUMBER 02 TO 17



				一般公差 ±0.2 TOLERANCE RANGE/公差範圍
A	FIRST DRAWING	MARY	2018.09.11	
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	

DRAWN/繪圖	DATE/日期	CROWN LINK® THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.						
MARY	2018.09.11	PRODUCT NAME/品名						
CHECK BY/審查	DATE/日期	2.54mm PITCH HOUSING FOR FFC/FPC						
VIVIAN	2018.09.11	PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號	UNIT/單位		
APPROVED BY/核准	DATE/日期	2802HS-XX	2-17 PIN	3:1	A4	mm		
WENDY	2018.09.11	MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本		
PACKAGE/包裝	02-05 PIN 1,000 PCS/BAG 06-17 PIN 500 PCS/BAG	PBT 4815	BLACK COLOR		1 OF 1	A		