



CROWN LINK[®]

專業薄膜開關連接器第一品牌

RoHS

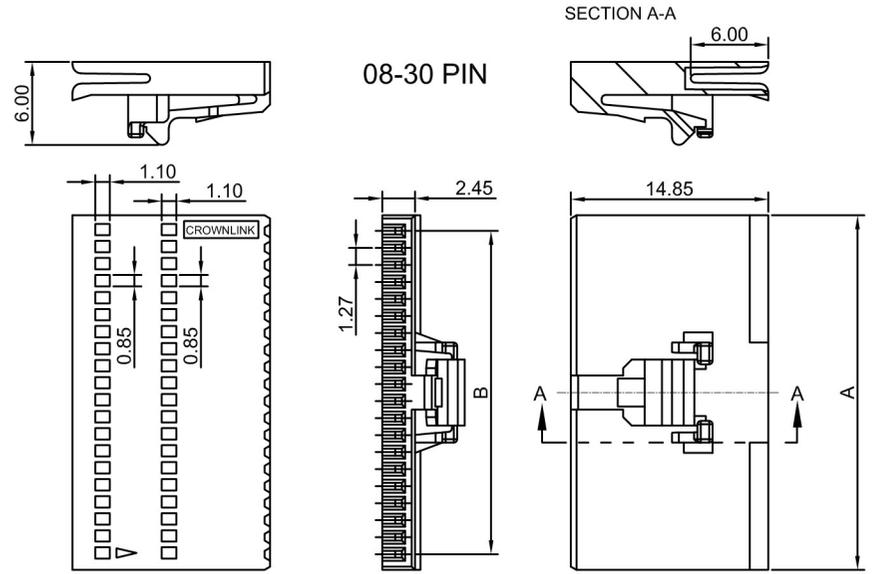

- ◆ FOR 2807 SERIES CONNECTOR
- ◆ SPECIFICATIONS
 - VOLTAGE RATING: 250 VAC RMS
 - CURRENT RATING: 2A
 - INSULATION RESISTANCE: 500MΩ MIN
- ◆ ENVIRONMENTAL
 - TEMPERATURE RANGE:-25°C~125°C
- ◆ PART NO.
 - 2807HLA - XX
 - SERIES NO. | CIRCUIITS NUMBER 04 TO 30

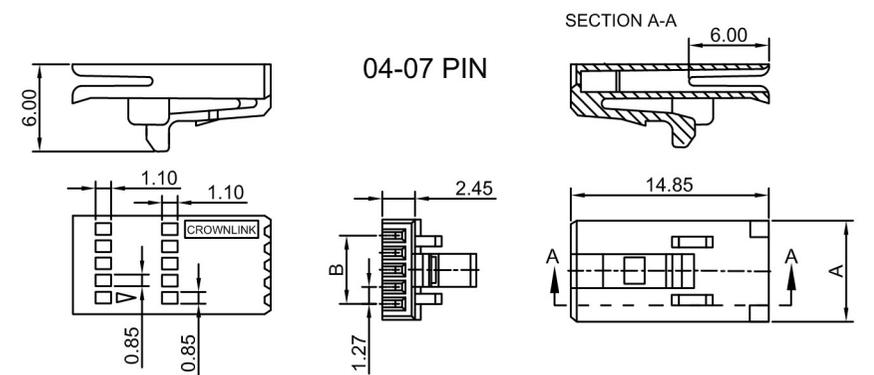

◆ SPECIFIED TOLERANCE

PIN NO.	A	B	PIN NO.	A	B	PIN NO.	A	B
04	6.15	3.81	13	17.58	15.24	22	29.01	26.67
05	7.42	5.08	14	18.85	16.51	23	30.28	27.94
06	8.69	6.35	15	20.12	17.78	24	31.55	29.21
07	9.96	7.62	16	21.39	19.05	25	32.82	30.48
08	11.23	8.89	17	22.66	20.32	26	34.09	31.75
09	12.50	10.16	18	23.93	21.59	27	35.36	33.02
10	13.77	11.43	19	25.20	22.86	28	36.63	34.29
11	15.04	12.70	20	26.47	24.13	29	37.90	35.56
12	16.31	13.97	21	27.74	25.40	30	39.17	36.83

B	The double-sided window hole becomes the single-sided window hole	MARY	2017.11.09
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期

一般公差 ± 0.2
TOLERANCE RANGE/公差範圍

DRAWN/繪圖	DATE/日期
MARY	2017.11.09
CHECK BY/審查	DATE/日期
VIVIAN	2017.11.09
APPROVED BY/核准	DATE/日期
JASON	2017.11.09
PACKAGE/包裝	04-07 PIN 1,000 PCS/BAG 08-30 PIN 500 PCS/BAG

<p>THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.</p> <p>CROWN LINK[®]</p>						
<p>PRODUCT NAME/品名 1.27mm PITCH HOUSING FOR FFC/FPC</p>						
PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號	UNIT/單位		
2807HLA-XX	4-30 PIN	3:1	A4	mm		
MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本		
LCP	BLACK COLOR		1 OF 1	B		