

4

3




2

1

CROWN LINK[®]

專業薄膜開關連接器第一品牌

40P=2.0*NP±0.35
1P-39P=2.0*NP-0.20±0.35

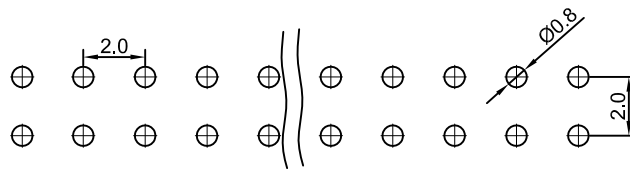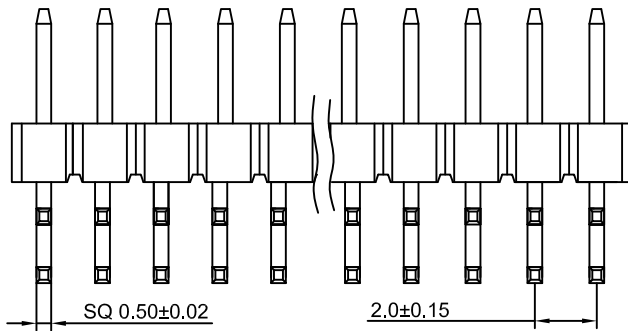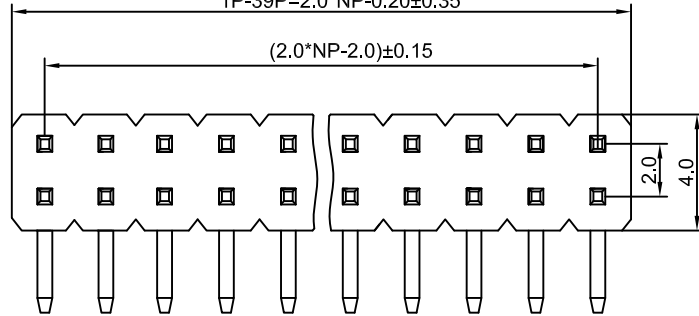

PCB LAYOUT



ROHS


◆ Specifications

- 1.Current Rating:2Amps
- 2.Insulation Resistance:1000 MΩ min
- 3.Dielectric withstanding Voltage: AC 500V
- 4.Contact Resistance:30 mΩ max
- 5.Operating Temperature:-25℃ to+85℃
- 6.Contact Material:Brass
- 7.Insulation Material:As follows
- 8.Plated:As follows

◆ PART NO.

L206 XX-XX 1 X X XX X

2.0mm double row	PLASTIC HEIGHT	PIN NO.	0=180°	MATERIAL	PLATED	SERIES NO.	PACKAGE
H*W	01~40	1=90°	1、PBT	0、Au0.8u"	01~69:Without a column	A=bag	
10=1.0*4.0	2=SMT	2=90°	3、NY6T	1、Au1u"	70~99:With inside column	B=tubes	
15=1.5*4.0			4、LCP	2、Au1.5u"		C=tray	
20=2.0*4.0			5、NY66	3、Au2u"		D=reel	
A=1.5			7、NY46	4、Au3u"			
A=1.2			8、NY9T	5、Au5u"			
A=0				6、Au10u"			
				7、Selectiv gold			
				8、Tin			
				9、Matte-Tin			



REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍
A	FIRST DRAWING	MARY	2017.08.17	LINER .0 ±0.30 ANGLES 0.° ±3° .00 ±0.20 .0° ±2° .000 ±0.10 .00° ±1°

DRAWN/繪圖	DATE/日期
MARY	2017.08.17
CHECK BY/審查	DATE/日期
VIVIAN	2017.08.17
APPROVED BY/核准	DATE/日期
WENDY	2017.08.17
PACKAGE/包裝	

CROWN LINK [®] THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.				
PRODUCT NAME/品名				
PH2.0*H 2*NP 90° DOUBLE ROW PIN HEADER				
PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號	UNIT/單位
L206XX-XX1XXXXX	02P-80P		A4	mm
MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本
	BLACK COLOR		1 OF 1	A