

4

3







2

1

# CROWN LINK®

專業薄膜開關連接器第一品牌

ROHS

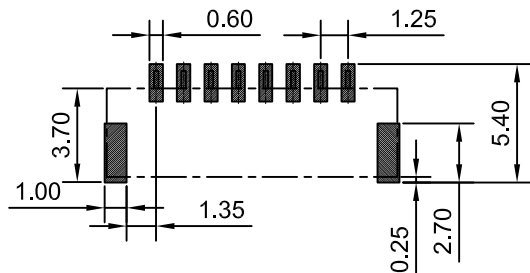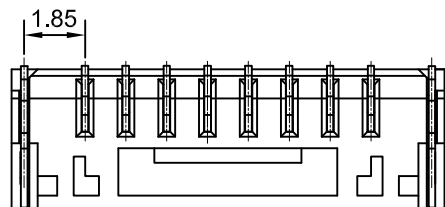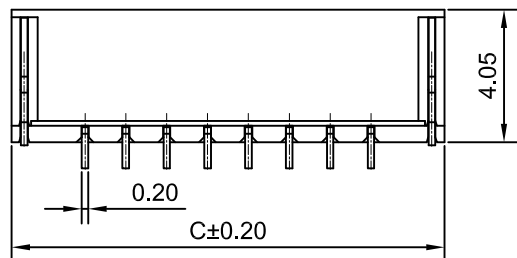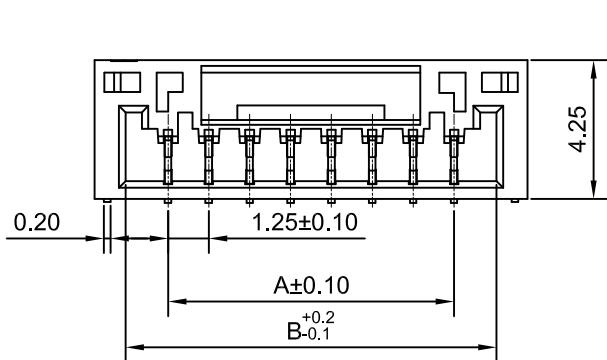

P.C.B LAYOUT

- ◆ FOR 1254HL HOUSING
- ◆ SPECIFICATIONS
  - VOLTAGE RATING: 50V AC,DC
  - CURRENT RATING: 1A AC,DC
  - CONTACT RESISTANCE: 20 mΩ MAX
  - INSULATION RESISTANCE: 100 MΩ MIN
  - WITHSTANDING VOLTAGE: 500V AC / MINUTE
- ◆ ENVIRONMENTAL
  - TEMPERATURE RANGE: -25°C~+85°C

◆ PART NO.

CL1254 S - XX W N H

SMT MOLD NO.  
NO LOGO  
LYING DOWN

SERIES NO. CIRCUITS NUMBER 02 TO 15

Part NO.	Dimensions			Part NO.	Dimensions		
	A	B	C		A	B	C
02	1.25	3.85	5.75	09	10.00	12.60	14.50
03	2.50	5.10	7.00	10	11.25	13.85	15.75
04	3.75	6.35	8.25	11	12.50	15.10	17.00
05	5.00	7.60	9.50	12	13.75	16.35	18.25
06	6.25	8.85	10.75	13	15.00	17.60	19.50
07	7.50	10.10	12.00	14	16.25	18.85	20.75
08	8.75	11.35	13.25	15	17.50	20.10	22.00

REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍

DRAWN/繪圖	DATE/日期
JUDY	2023.08.23
CHECK BY/審查	DATE/日期
VIVIAN	2023.08.23
APPROVED BY/核准	DATE/日期
JASON	2023.08.23
PACKAGE/包裝	1,500PCS/REEL

<b>CROWN LINK® THE LEADING MANUFACTURER OF FPC &amp; FFC CONNECTOR, HOUSING AND DOME.</b>					
PRODUCT NAME/品名					
1.25mm PITCH SMT WAFER					
PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號	UNIT/單位	
CL1254S-XXWNH	02-15 PIN	5:1	A4	mm	
MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本	
PHOSPHOR BRONZE	NATURAL		1 OF 1	A	
TIN PA6T UL94V-0					