

4

3



2

1



CROWN LINK®

專業薄膜開關連接器第一品牌


ROHS

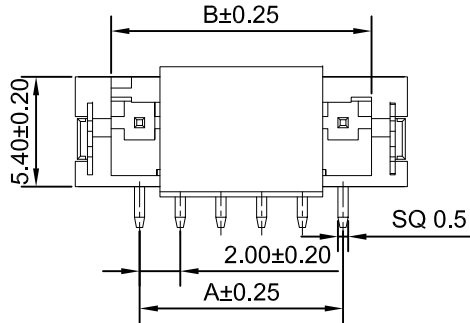

- ◆ FOR 2001H HOUSING
- ◆ SPECIFICATIONS
 - VOLTAGE RATING: 100V AC,DC
 - CURRENT RATING: 2A AC,DC
 - CONTACT RESISTANCE: 10 mΩ MAX
 - INSULATION RESISTANCE: 1000 MΩ MIN
 - WITHSTANDING VOLTAGE: 800V AC / MINUTE
- ◆ ENVIRONMENTAL
 - TEMPERATURE RANGE: -40°C~+105°C

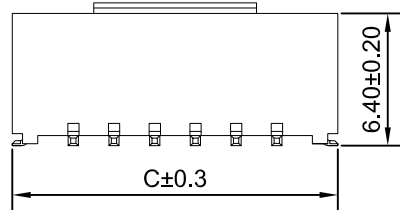

◆ PART NO.
 CL2001 S - XX V N P
 SERIES NO. SMT MOLD NO. NO LOGO VERTICAL
 CIRCUITS NUMBER 02 TO 16

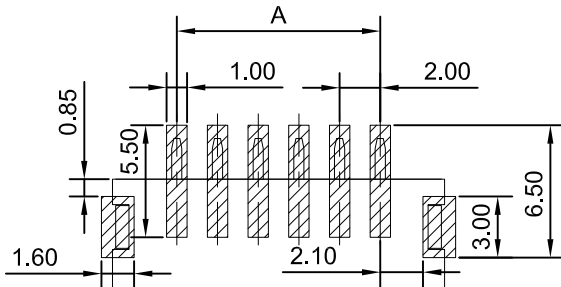

P.C.B LAYOUT

Part NO.	Dimensions		
	A	B	C
02	2.00	4.80	8.00
03	4.00	6.80	10.00
04	6.00	8.80	12.00
05	8.00	10.80	14.00
06	10.00	12.80	16.00
07	12.00	14.80	18.00
08	14.00	16.80	20.00
09	16.00	18.80	22.00
10	18.00	20.80	24.00
11	20.00	22.80	26.00
12	22.00	24.80	28.00
13	24.00	26.80	30.00
14	26.00	28.80	32.00
15	28.00	30.80	33.00
16	30.00	32.80	36.00

REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期

X. ±0.50 X.* ±1°
 .X ±0.30 .X* ±0.1°
 .XX ±0.20 .XX* ±0.01°
 .XXX ±0.05 .XXX* ±0.005°

TOLERANCE RANGE/公差範圍

DRAWN/繪圖 JUDY	DATE/日期 2023.08.05	CROWN LINK® THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.				
CHECK BY/審查 VIVIAN	DATE/日期 2023.08.05	PRODUCT NAME/品名 2.00mm PITCH SMT WAFER				
APPROVED BY/核准 JASON	DATE/日期 2023.08.05	PART NO./料號 CL2001S-XXVNP	PIN NUMBER/針數 02-16 PIN	SCALE/比例 5:1	SIZE/圖號 A4	UNIT/單位 mm
PACKAGE/包裝	REEL	MATERIAL/材質 BRASS TIN LCP UL 94V-0	COLOR/顏色 NATURAL	ANGLE OF VIEW/視角 	SHEET/頁碼 1 OF 1	REV/版本 A