
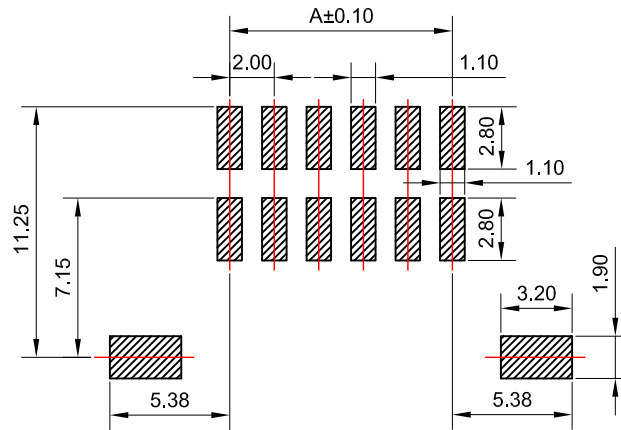
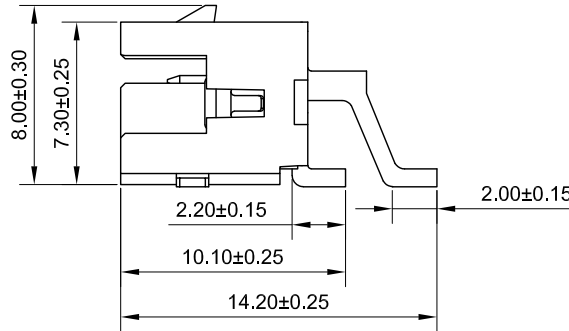


# CROWN LINK®

專業薄膜開關連接器第一品牌

ROHS

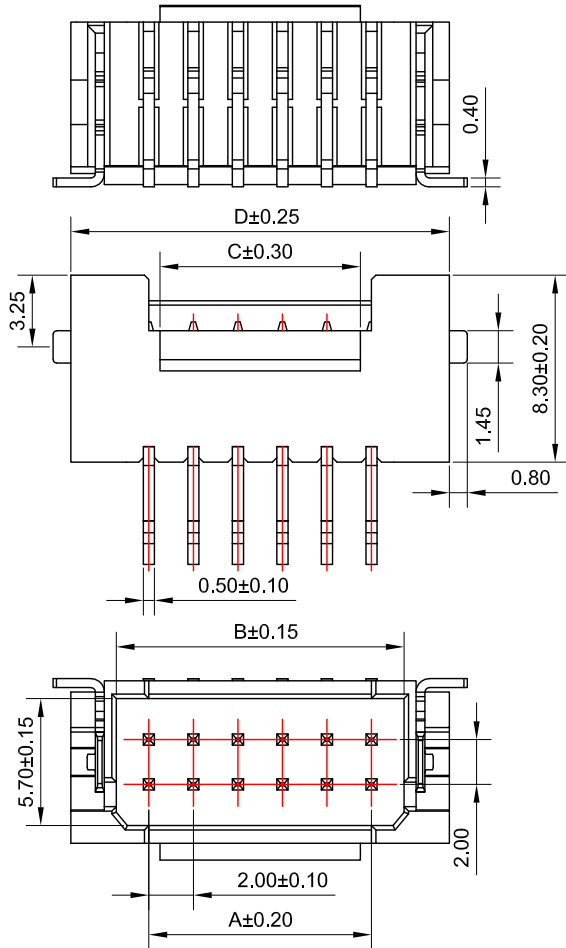

P.C.B LAYOUT

- ◆ FOR 2009HL HOUSING
- ◆ SPECIFICATIONS
  - VOLTAGE RATING: 250V AC,DC
  - CURRENT RATING: 3A AC,DC
  - CONTACT RESISTANCE: 20 mΩ MAX
  - INSULATION RESISTANCE: 1000 MΩ MIN
  - WITHSTANDING VOLTAGE: 800V AC / MINUTE
- ◆ ENVIRONMENTAL
  - TEMPERATURE RANGE: -25°C~+85°C
- ◆ PART NO.
  - CL2009 S - XX W N H
  - SMT
  - NO LOGO
  - LYING DOWN
  - SERIES NO.      CIRCUITS NUMBER 04 TO 28 OR 36/40
  - MOLD NO.

Part NO.	Dimensions				Part NO.	Dimensions			
	A	B	C	D		A	B	C	D
04	2.00	4.90	3.00	9.00	20	18.00	20.90	15.00	25.00
06	4.00	6.90	3.00	11.00	22	20.00	22.90	17.00	27.00
08	6.00	8.90	3.00	13.00	24	22.00	24.90	19.00	29.00
10	8.00	10.90	5.00	15.00	26	24.00	26.90	21.00	31.00
12	10.00	12.90	7.00	17.00	28	26.00	28.90	23.00	33.00
14	12.00	14.90	9.00	19.00	36	34.00	36.90	31.00	41.00
16	14.00	16.90	11.00	21.00	40	38.00	40.90	35.00	45.00
18	16.00	18.90	13.00	23.00					

REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍

DRAWN/繪圖	DATE/日期
JUDY	2023.10.16
CHECK BY/審查	DATE/日期
VIVIAN	2023.10.16
APPROVED BY/核准	DATE/日期
JASON	2023.10.16
PACKAGE/包裝	500PCS/REEL

<b>CROWN LINK® THE LEADING MANUFACTURER OF FPC &amp; FFC CONNECTOR, HOUSING AND DOME.</b>						
PRODUCT NAME/品名 2.00mm PITCH SMT WAFER (PHB)						
PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號	UNIT/單位		
CL2009S-XXWNH	04-28/36/40PIN	5:1	A4	mm		
MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本		
BRASS TIN LCP UL94V-0	NATURAL		1 OF 1	A		

X: ±0.30 X\*: ±2\*  
 X: ±0.30 X\*: ±2\*  
 .XX ±0.20 .XX\*: ±1\*  
 .XXX ±0.10 .XXX\*: ±0.5\*