

4

3





2

1

CROWN LINK[®]

專業薄膜開關連接器第一品牌


RoHS

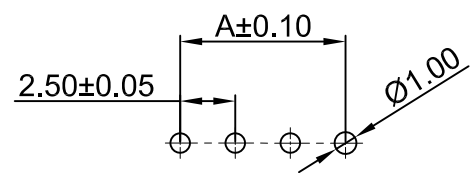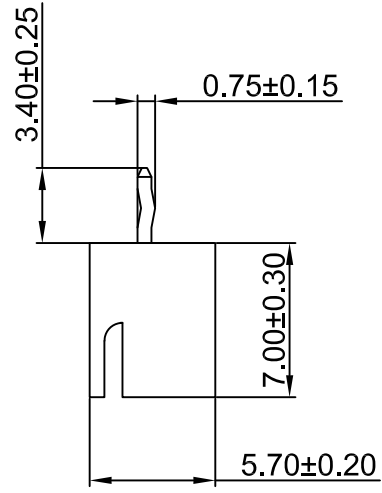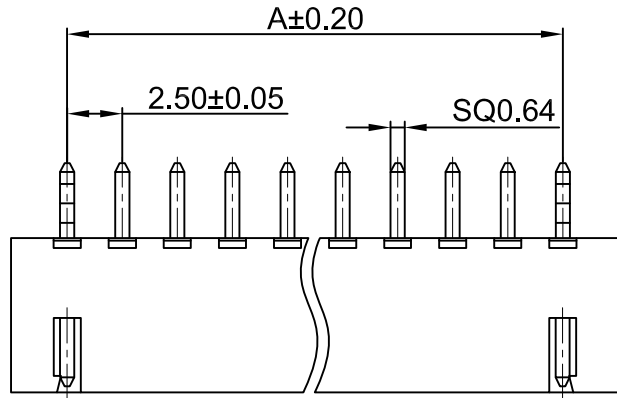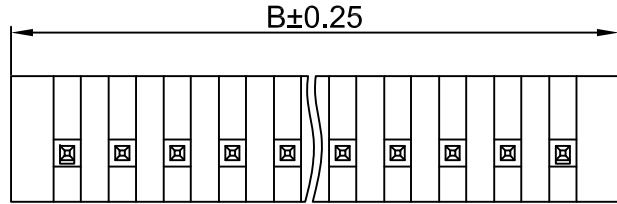

P.C.B LAYOUT

- ◆ FOR 2501H HOUSING
- ◆ SPECIFICATIONS
 - VOLTAGE RATING: 250V AC, DC
 - CURRENT RATING: 3 A AC,DC
 - CONTACT RESISTANCE: 10mΩ MAX
 - INSULATION RESISTANCE: 1000 MΩ MIN
 - WITHSTANDING VOLTAGE: 1000V AC / MINUTE
- ◆ ENVIRONMENTAL
 - TEMPERATURE RANGE: -25°C~+85°C

◆ PART NO.

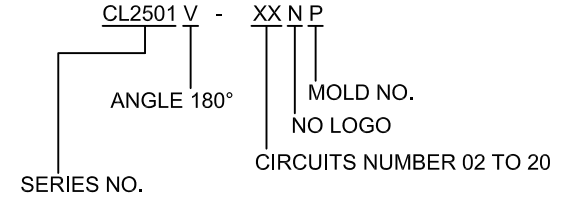

Part NO.	Dimensions		Part NO.	Dimensions	
	A	B		A	B
02	2.50	7.61	12	27.50	32.60
03	5.00	10.10	13	30.00	35.10
04	7.50	12.60	14	32.50	37.60
05	10.00	15.10	15	35.00	40.10
06	12.50	17.60	16	37.50	42.60
07	15.00	20.10	17	40.00	45.10
08	17.50	22.60	18	42.50	47.60
09	20.00	25.10	19	45.00	50.10
10	22.50	27.60	20	47.50	52.60
11	25.00	30.10			

REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期

TOLERANCE RANGE/公差範圍
X .±0.50 X [^] ±1°
.X ±0.30 .X [^] ±0.1°
.XX ±0.20 .XX [^] ±0.01°
.XXX ±0.05 .XXX [^] ±0.005°

DRAWN/繪圖	DATE/日期
JUDY	2023.07.07
CHECK BY/審查	DATE/日期
VIVIAN	2023.07.07
APPROVED BY/核准	DATE/日期
JASON	2023.07.07
PACKAGE/包裝	BAG

CROWN LINK[®] THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.

PRODUCT NAME/品名: 2.5mm XHB Wafer for Cable

PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號	UNIT/單位
CL2501V-XXNP	02-20 PIN	3:1	A4	mm
MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本
BRASS/TIN NY66 UL94V-0	NATURAL		1 OF 1	D