
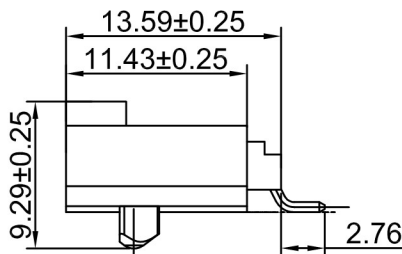

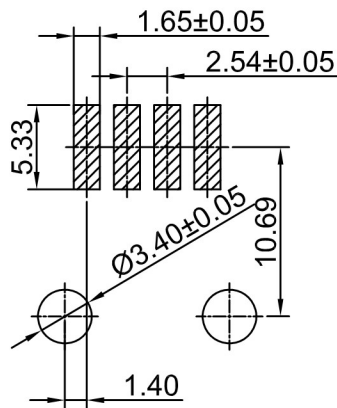



CROWN LINK®

專業薄膜開關連接器第一品牌

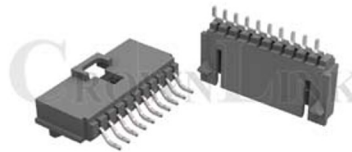

SPECIFICATIONS

VOLTAGE RATING: 250V AC , DC
CURRENT RATING: 3 A AC , DC
CONTACT RESISTANCE: 20 mΩ MAX
INSULATION RESISTANCE: 1000 MΩ MIN
WITHSTANDING VOLTAGE: 1500V AC / MINUTE

ENVIRONMENTAL

TEMPERATURE RANGE: -40°C~+105°C

DIMENSION: N=CIRCUIT NO.

A=(2.54*N)-2.54

B=(2.54*N)+2.54+1.27

PART NO.

CL2545 S - XXSNP

SMT

MOLD NO.

NO LOGO

REEL PACKAGE

SERIES NO.

CIRCUITS NUMBER 02 TO 25

RoHS

PART NO.	Dimensions		PART NO.	Dimensions	
	A	B		A	B
2P	2.54	8.89	14P	32.02	39.37
3P	5.08	11.43	15P	35.56	41.91
4P	7.62	13.97	16P	38.10	44.45
5P	10.16	16.51	17P	40.64	46.99
6P	12.70	19.05	18P	43.18	49.53
7P	15.24	21.59	19P	45.72	52.07
8P	17.78	24.13	20P	48.26	54.61
9P	20.32	26.67	21P	50.80	57.15
10P	22.86	29.21	22P	53.34	59.69
11P	25.40	31.75	23P	55.88	62.23
12P	27.94	34.29	24P	58.42	64.77
13P	30.48	36.83	25P	60.96	67.31

				0.	±0.3
				0.0	±0.25
				0.00	±0.20
				0.000	±0.10
A	FIRST DRAWING	TRACY	2016.06.14	TOLERANCE RANGE/公差範圍	
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期		

DRAWN/繪圖	DATE/日期
MARY	2017.09.06
CHECK BY/審查	DATE/日期
VIVIAN	2017.09.06
APPROVED BY/核准	DATE/日期
JASON	2017.09.06
PACKAGE/包裝	REEL

CROWN LINK® THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.					
PRODUCT NAME/品名					
2.54mm SMT WAFER					
PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號	UNIT/單位	
CL2545S-XXSNP	2-25 PIN	3:1	A4	mm	
MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本	
BRASS/GOLD OVER NICKEL & LCP UL94V-0	BLACK COLOR		1 OF 1	A	