

4

3



2

1

# CROWN LINK®

專業薄膜開關連接器第一品牌

RoHS

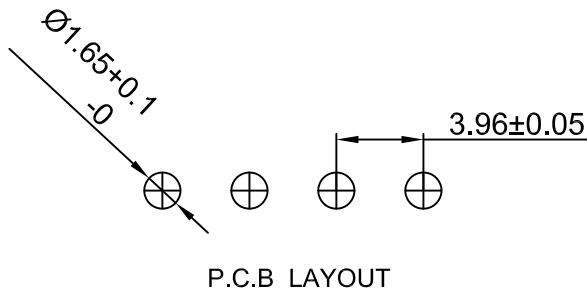
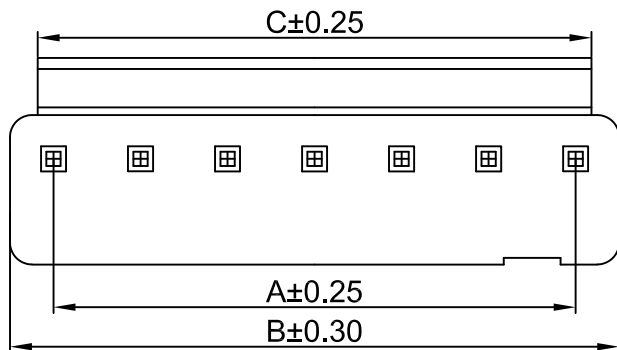


- ◆ SPECIFICATIONS
  - VOLTAGE RATING: 250V AC, DC
  - CURRENT RATING: 7 A AC, DC
  - CONTACT RESISTANCE: 10mΩ Max
  - INSULATION RESISTANCE: 1000 MΩ MIN
  - WITHSTANDING VOLTAGE: 1500V AC / MINUTE


- ◆ ENVIRONMENTAL
  - TEMPERATURE RANGE: -40°C ~ +105°C

◆ PART NO.

CL3960 V - XX N P  
 ANGLE 180° MOLD NO.  
 NO LOGO  
 SERIES NO. CIRCUITS NUMBER 02 TO 15

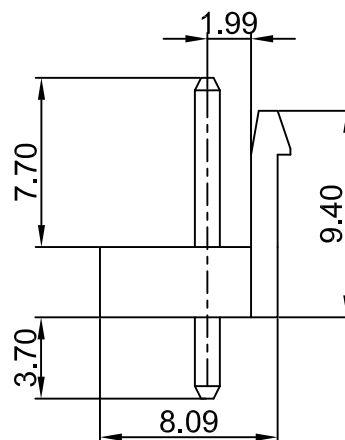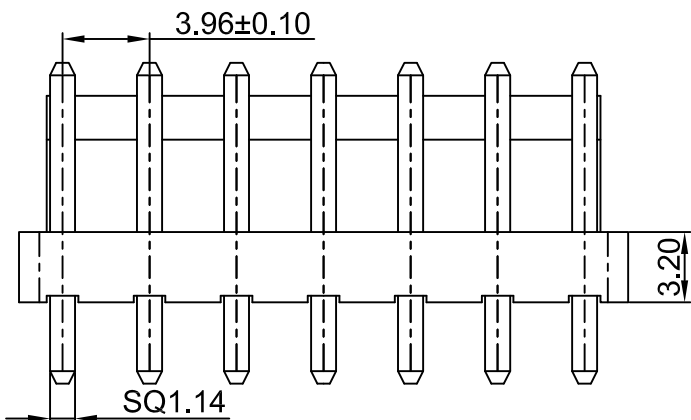

PIN NO.	A	B	C	PIN NO.	A	B	C
02	3.96	7.92	5.40	09	31.68	35.64	33.12
03	7.92	11.88	9.36	10	35.64	39.60	37.08
04	11.88	15.84	13.32	11	39.60	43.56	41.04
05	15.84	19.80	17.28	12	43.56	47.52	45.00
06	19.80	23.76	21.24	13	47.52	51.48	48.96
07	23.76	27.72	25.20	14	51.48	55.44	52.92
08	27.72	31.68	29.16	15	55.44	59.40	56.88

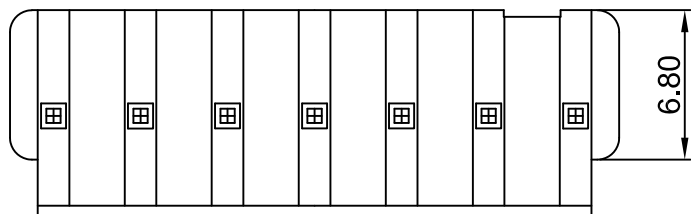

X. ±0.50  
 .X ±0.30  
 .XX ±0.20  
 .XXX ±0.05

TOLERANCE RANGE/公差範圍

DRAWN/繪圖	DATE/日期
JUDY	2021.08.13
CHECK BY/審查	DATE/日期
VIVIAN	2021.08.13
APPROVED BY/核淮	DATE/日期
JASON	2021.08.13
PACKAGE/包裝	BAG

<b>CROWN LINK® THE LEADING MANUFACTURER OF FPC &amp; FFC CONNECTOR, HOUSING AND DOME.</b>						
PRODUCT NAME/品名 3.96mm PITCH 180° WAFER						
PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號	UNIT/單位		
CL3960V-XXNP	02-15 PIN	3:1	A4	mm		
MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本		
Brass Plated Tin NY66 UL94V-0	WHITE COLOR		1 OF 1	D		

REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期
--------	------------------------	----------	---------