

4

3


2

1

CROWN LINK®

專業薄膜開關連接器第一品牌

ROHS

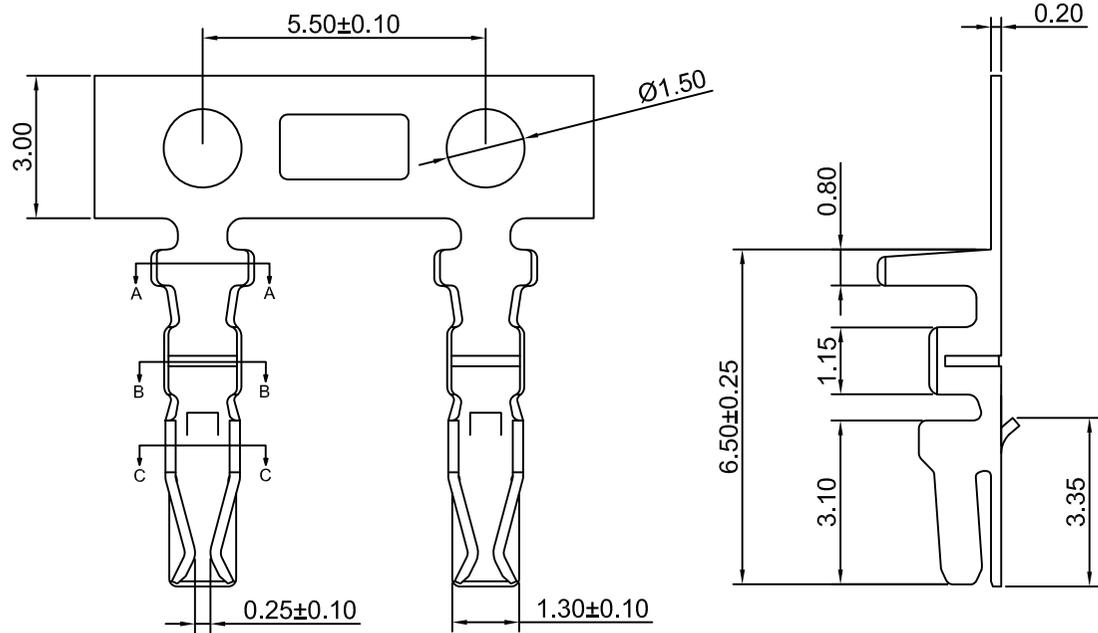


- ◆ FOR 2006H/2012HL SERIES HOUSING
- ◆ SPECIFICATIONS
 - VOLTAGE RATING: 250V AC,DC
 - CURRENT RATING: 3A AC,DC
 - WITHSTANDING VOLTAGE: 800V AC / MINUTE
 - INSULATION RESISTANCE: 1000 MΩ MIN
 - CONTACT RESISTANCE: 10mΩ MAX
 - TEMPERATURE RANGE: -40°C~+105°C


◆ APPLICABLE WIRE: AWG22#-28#

◆ PART NO.


2006- 10K - 0T(0G/MT) - F P

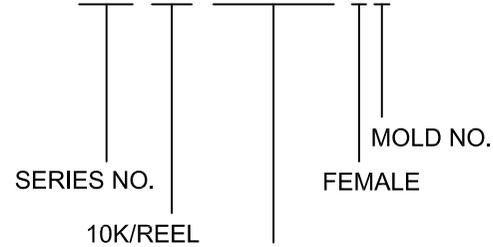


0T:TIN PLATED.
 0G:GOLD PLATED.
 MT:MATTE TIN PLATED.
 OTHER PLATINGS ON REQUEST.



A-A SECTION



B-B SECTION



C-C SECTION

REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期

TOLERANCE RANGE/公差範圍
 X: ±0.50 X": ±1"
 XX: ±0.20 XX": ±0.11"
 XXX: ±0.05 XXX": ±0.005"

DRAWN/繪圖 JUDY	DATE/日期 2023.06.07	CROWN LINK® THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.			
CHECK BY/審查 VIVIAN	DATE/日期 2023.06.07	PRODUCT NAME/品名 5.50mm PITCH CONNECTOR FOR CABLE			
APPROVED BY/核准 WENDY	DATE/日期 2023.06.07	PART NO./料號 2006-10K-0T(0G/MT)-FP	SCALE/比例 8:1	SIZE/圖號 A4	UNIT/單位 mm
PACKAGE/包裝	10,000PCS/REEL	MATERIAL/材質 PHOSPHOR BRONZE	ANGLE OF VIEW/視角 	SHEET/頁碼 1 OF 1	REV/版本 A