

4

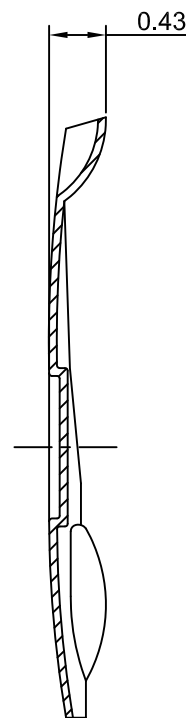
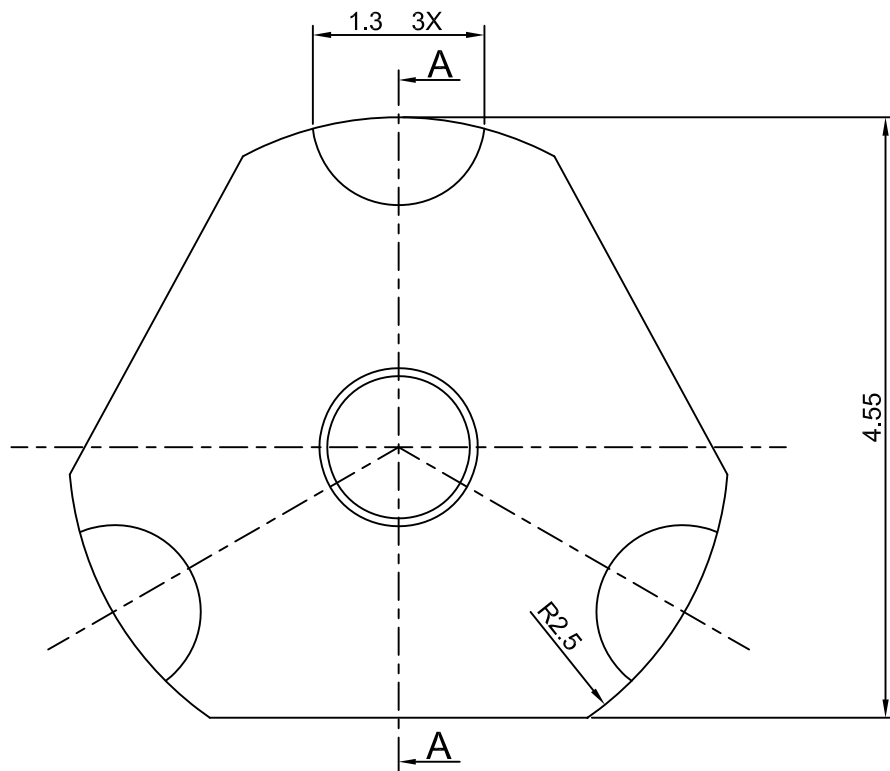
3

2

1

# CROWN LINK<sup>®</sup>

專業薄膜開關連接器第一品牌

**ROHS****◆ SPECIFICATIONS**

TRIP FORCE: 160 ± 30 g

CLICK RATIO: MIN 35 %

**◆ TESTING CONDITIONS**

FORCE TEST PROBE: HARD POINTED

LIFE TEST PROBE: RB 60° SILICON ROUND HEAD

LIFE TEST FORCE: 210 g

LIFE TEST SPEED: 180 CYCLE / MIN

BURR: MAX 0.05 MM

UNLESS OTHERWISE SPECIFIED TESTING METHOD  
ACCORDING TO CROWN LINK STANDARD PROCEDURE**SECTION A-A**

|        |                               |          |            |                         |
|--------|-------------------------------|----------|------------|-------------------------|
| C      | CONVERT TO NEW DRAWING FORMAT | ANNIE    | 2013.02.26 | X.XX ±0.10              |
| B      | CONVERT TO NEW DRAWING FORMAT | ANNIE    | 2010.05.10 |                         |
| A      | FIRST DRAWING                 | ANNIE    | 2008.04.26 |                         |
| REV/版本 | MODIFIED CONTENT /變更內容        | DRAWN/繪圖 | DATE/日期    |                         |
|        |                               |          |            | TOLERANCE<br>RANGE/公差範圍 |

|                |               |                                                                                                      |                  |          |          |         |
|----------------|---------------|------------------------------------------------------------------------------------------------------|------------------|----------|----------|---------|
| DRAWN/繪圖       | DATE/日期       | <b>CROWN LINK<sup>®</sup> THE LEADING MANUFACTURER OF FPC &amp; FFC CONNECTOR, HOUSING AND DOME.</b> |                  |          |          |         |
| ANNIE          | 2013.02.26    |                                                                                                      |                  |          |          |         |
| CHECK BY/審查    | DATE/日期       | PRODUCT NAME/品名 METAL DOME                                                                           |                  |          |          |         |
| VIVIAN         | 2013.02.26    |                                                                                                      |                  |          |          |         |
| APPROVED BY/核准 | DATE/日期       | PART NO./料號                                                                                          | THICKNESS/厚度     | SCALE/比例 | SIZE/圖號  | UNIT/單位 |
| JASON          | 2013.02.26    | CL5-TSD-160T                                                                                         | 0.06 mm          | 18:1     | A4       | mm      |
| PACKAGE/包裝     | 10,000PCS/BAG | MATERIAL/材質                                                                                          | ANGLE OF VIEW/視角 |          | SHEET/頁碼 | REV/版本  |
|                |               | STAINLESS STEEL SUS 304                                                                              |                  |          | 1 OF 1   | C       |